

Urethane Timing Belts and Pulleys





Gates Mectrol

Passion for Products

OUR EXPERTISE

Gates Mectrol is a global manufacturer of belting and other automation components to the material handling industry. Our products are typically used in synchronous and positive drive conveying, linear positioning and power transmission applications within the general industrial and food processing markets.

Equipment designers and system integrators have come to rely on Gates Mectrol's application expertise and ability to solve the most challenging design issues. Our highly skilled applications engineers and online suite of design tools can help solve your most demanding development concerns.

Get the Gates Mectrol engineering team working for you.

OUR ACCESSIBILITY

With manufacturing facilities and partner distributors located throughout the world, Gates Mectrol is available globally to serve your specific design challenges. Our associates know and understand our business — and yours.

OUR GOAL

Gates Mectrol's goal is to become your primary supplier of polymer based automation components. We will earn this position by offering quality products in a timely manner and by continuously developing new products and services.

IMAGINATION, DESIGN, EXECUTION

Urethane Timing Belts and Pulleys

Table of Contents

| | |
|---------------------------------|----|
| Belt Selection Guide | 4 |
| Tooth Pitch Comparison | 5 |
| Linear Belts | |
| Linear Belt Overview | 6 |
| Linear Belt Applications | 7 |
| Linear Belt Specifications | 8 |
| Imperial Pitch Belts | 10 |
| T Pitch Belts | 11 |
| AT Pitch Belts | 12 |
| HTD® and STD Pitch Belts | 13 |
| SelfTracking Belts | 14 |
| Integral V-Guide Specifications | 16 |
| Wide Belt Overview | 19 |
| Wide Belt Specifications | 20 |
| Wide Belt GMT3 | 21 |
| Profiled Belts Overview | 22 |
| Design Recommendations | 23 |
| QuickShip Profile Program | 27 |
| Backings | 28 |
| Backings Specifications | 32 |
| Fabrication Capabilities | 34 |

Truly Endless Belts

| | |
|-----------------------------------|----|
| Truly Endless Belt Overview | 36 |
| Gates Synchro-Power® (Cast) Belts | 37 |
| Flex Belts | 41 |

Flat Belts

| | |
|--------------------------|----|
| Flat Belt Overview | 42 |
| Design Recommendations | 43 |
| Flat Belt Specifications | 44 |

Timing Pulleys and Clamps

| | |
|-----------------------|----|
| Pulley Overview | 46 |
| Custom Pulley Program | 47 |
| Clamp Plates | 49 |


Tools and Reference

| | |
|-------------------------------|----|
| Technical Design Tools Online | 51 |
| Facilities | 52 |
| Notes | 53 |
| Contact Information | 54 |


Broadest Range Available



Belt Selection Guide

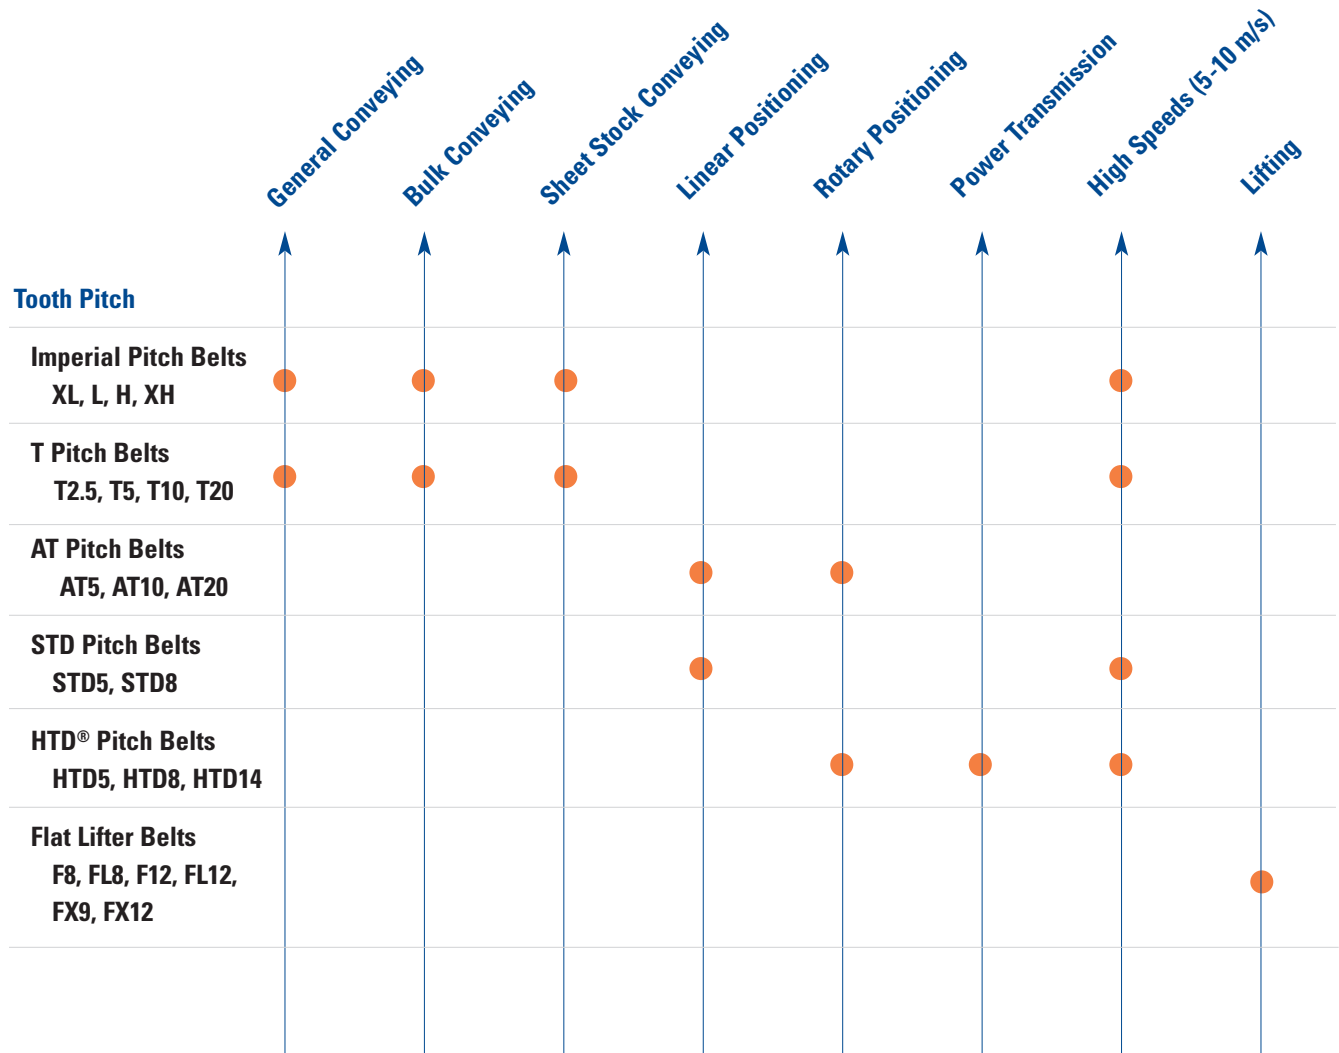


Industrial Tooth Pitch Comparison




Imperial Pitch Belts - XL, L, H, XH

This classic trapezoidal pitch is the original timing belt tooth design. This tooth pitch is commonly used for **conveying applications**. The tooth profile is fairly low and has a large surface area at the tip of the tooth providing good support on sliding conveyor surfaces.




T Pitch Belts - T2.5, T5, T10, T20

These metric trapezoidal pitches are similar to imperial pitches, also commonly used for **conveying applications**, yet have a slightly deeper tooth engagement than imperial profiles. The tooth meshing is more reliable. However, backlash can be slightly greater.




AT Pitch Belts - AT5, AT10, AT20

This pitch was developed to enable higher load carrying capacity combined with low backlash. The stronger and stiffer tooth makes these belts ideal for **linear positioning and motion control**, but may require larger pulley diameters.



STD Pitch Belts - STD5, STD8

This tooth pitch provides superior load distribution, low backlash, and **reduced wear and noise** characteristics. It is an excellent profile for **linear positioning and power transmission** applications.



HTD Pitch Belts - HTD5, HTD8, HTD14

This rounded tooth pitch is similar to STD, and is also an excellent profile for **linear and rotary positioning** and **power transmission** applications, yet has deeper tooth engagement. Note that the HTD pitch may exhibit slight increases in noise and wear.


Linear Belt Overview

Gates Mectrol manufactures linear timing belts in a variety of tooth pitch, length, and material combinations. This offering provides a wide range of possible configurations for your application.


Linear belt lengths are available in two styles — welded endless and open ended. Welded endless belts are ideal for low torque conveying applications. Open ended belts are typically used for motion control applications.

Features

- Very high tensile strength and stiffness
- Parallel cord construction
 - No cords exposed at belt edges
 - Better tracking
 - Uniform tensioning
- Tough polyurethane construction
 - Durable and cut resistant
 - Oil, chemical and water resistant
 - Non-marking
- Steel or Kevlar® tension members
- Choice of polymers including FDA grades
- Nylon back and nylon tooth surface options available for quieter operation and reduced friction
- Various molded profiles and backing materials available
- Wide range of tooth pitches to meet your application requirements

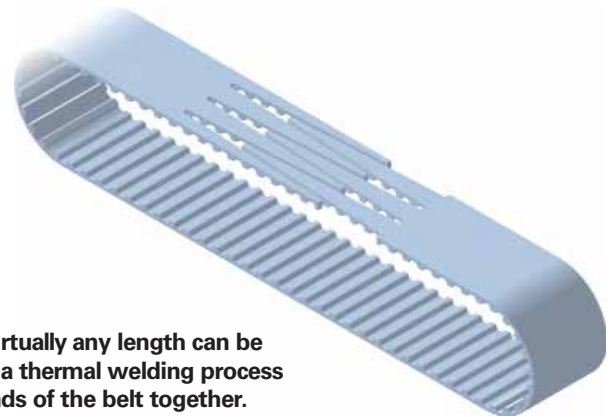


Endless belts of virtually any length can be produced utilizing a thermal welding process which joins the ends of the belt together.

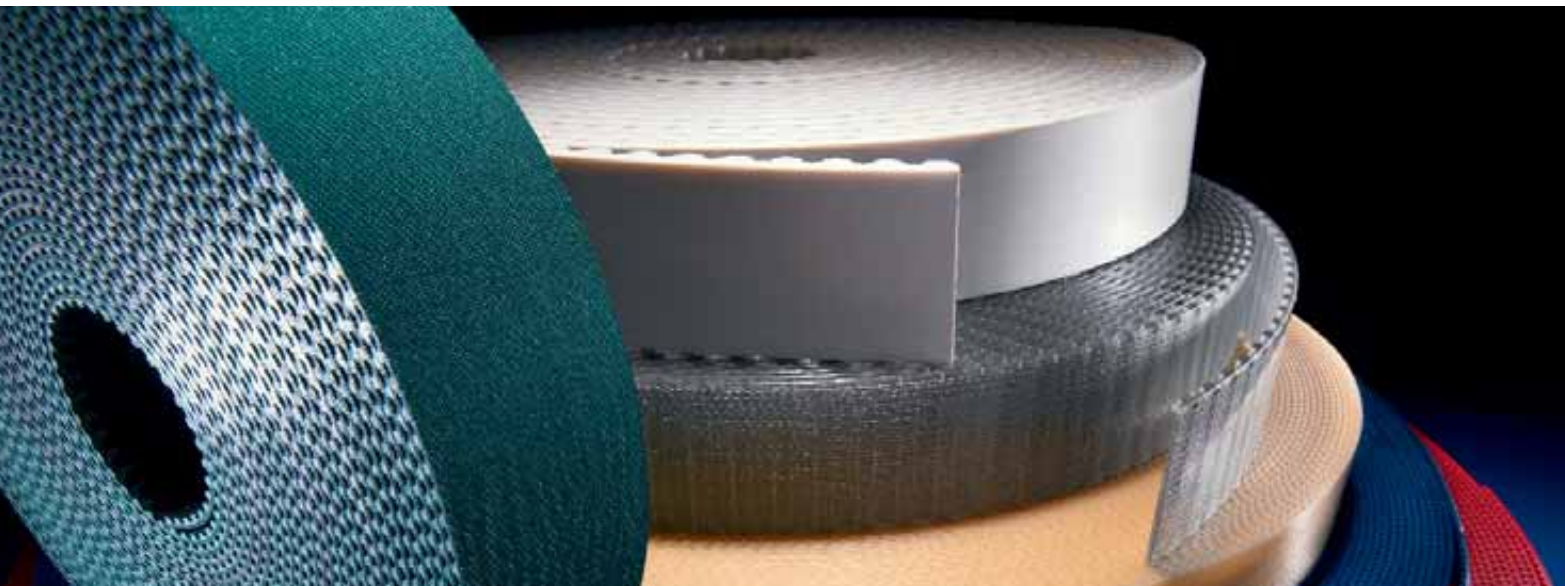

Linear Belt Applications

Application Characteristics

- High precision positioning or indexing
- Synchronous conveying
- High acceleration, deceleration or continuous high running speeds
- Multiple belt, common shaft conveying
- Customized belts to meet any application need

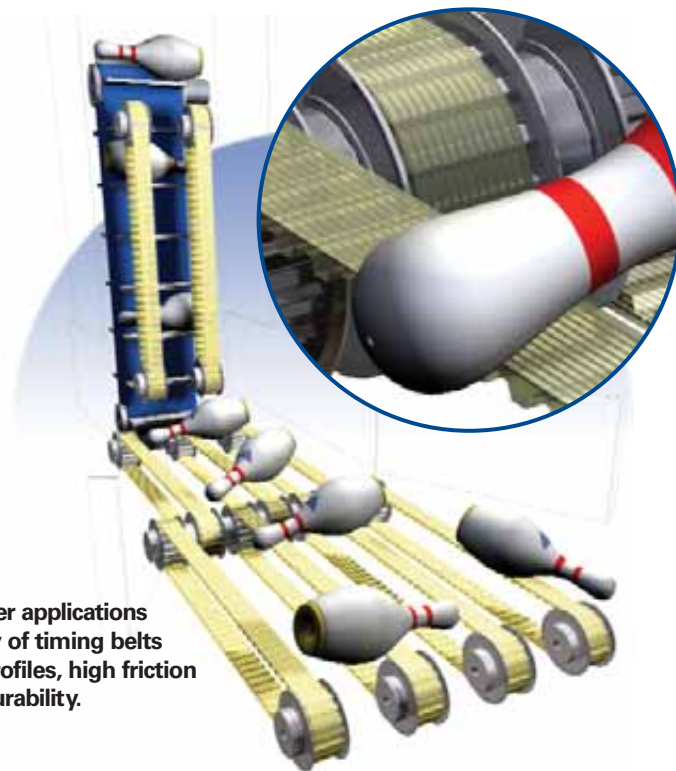

Bowling pinsetter applications require a variety of timing belts with different profiles, high friction backings, and durability.



Urethane timing belts are ideal for use in vertical and horizontal door applications. Durable and clean running, these belts provide quiet and positive motion for industrial, train, elevator, and automatic slide door applications.



Rough Top backing on urethane timing belts allows synchronous conveying of sheet glass without interference from glass shards.

>> Our Applications Engineering staff is available to you at apps@gatesmectrol.com or **1-800-394-4844**

Linear Belt Specifications

| | | | XL | L | H | H-HF | XH | T5 | AT5 | ATL5 | |
|--|------------------|------------|--------------|--------------|--------------|--------------|--------------|---------------|--------------|--------------|--------------|
| Pitch (Imperial and Metric) | | | .200" | .375" | .500" | .500" | .875" | 5 mm | 5 mm | 5 mm | |
| Ultimate Tensile Strength per Inch or 25 mm Belt Width | Steel | lbf/in | 759 | 1474 | 1605 | 2369 | 3204 | 759 | 1602 | 2369 | |
| | | N/25 mm | 3375 | 6555 | 7140 | 10540 | 14250 | 3375 | 7125 | 10540 | |
| | Kevlar | lbf/in | 1882 | 1727 | 1818 | N/A | 3639 | 1200 | 1877 | N/A | |
| | | N/25 mm | 8370 | 7682 | 8085 | N/A | 16185 | 5332 | 8350 | N/A | |
| | Stainless Steel | lbf/in | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | |
| | | N/25 mm | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | |
| Max. Allowable Belt Tension per Inch or 25 mm Belt Width | Steel | Open Ended | lbf/in | 192 | 371 | 436 | 534 | 854 | 189 | 396 | 526 |
| | | | N/25 mm | 853 | 1652 | 1939 | 2377 | 3801 | 840 | 1761 | 2340 |
| | | Welded | lbf/in | 96 | 186 | 218 | 267 | 427 | 94 | 198 | 198 |
| | | | N/25 mm | 427 | 826 | 970 | 1189 | 1900 | 420 | 880 | 880 |
| | Kevlar | Open Ended | lbf/in | 209 | 276 | 243 | N/A | 400 | 180 | 272 | N/A |
| | | | N/25 mm | 930 | 1229 | 1081 | N/A | 1778 | 801 | 1210 | N/A |
| | | Welded | lbf/in | 157 | 207 | 182 | N/A | 300 | 140 | 204 | N/A |
| | | | N/25 mm | 698 | 922 | 810 | N/A | 1334 | 687 | 908 | N/A |
| | Stainless Steel | Open Ended | lbf/in | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | | | N/25 mm | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | | Welded | lbf/in | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| | | | N/25 mm | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Allowable Effective Tension for Belt Teeth (15 and more teeth in mesh) | | | lbf/in | 180 | 360 | 441 | 441 | 879 | 200 | 290 | 290 |
| | | | N/25 mm | 800 | 1600 | 1960 | 1960 | 3910 | 890 | 1290 | 1290 |
| Specific Belt Weight | Steel | lbf/ft/in | 0.036 | 0.059 | 0.066 | 0.072 | 0.180 | 0.037 | 0.055 | 0.062 | |
| | | kgf/m/cm | 0.021 | 0.035 | 0.039 | 0.042 | 0.105 | 0.022 | 0.032 | 0.036 | |
| | Kevlar | lbf/ft/in | 0.033 | 0.052 | 0.055 | N/A | 0.155 | 0.033 | 0.046 | N/A | |
| | | kgf/m/cm | 0.019 | 0.030 | 0.032 | N/A | 0.091 | 0.020 | 0.027 | N/A | |
| | Stainless Steel | lbf/ft/in | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | |
| | | kgf/m/cm | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | |
| Specific Belt Stiffness (Open Ended) | Steel | lbf/in | 47950 | 92800 | 109000 | 133600 | 213600 | 47950 | 100500 | 133600 | |
| | | N/mm | 8400 | 16255 | 19085 | 23400 | 37410 | 8400 | 17605 | 23400 | |
| | Kevlar | lbf/in | 52250 | 69100 | 60700 | N/A | 100000 | 52250 | 69100 | N/A | |
| | | N/mm | 9155 | 12100 | 10635 | N/A | 17500 | 9155 | 12100 | N/A | |
| | Stainless Steel | lbf/in | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | |
| | | N/mm | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | |
| Min. No. of Pulley Teeth | Steel and Kevlar | | 10 | 10 | 14 | 12 | 18 | 10 | 15 | 15 | |
| | Stainless Steel | | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | |
| Min. Pitch Diameter (Inch or mm) | Steel and Kevlar | | inch or mm | .64" | 1.19" | 2.23" | 1.91" | 5.01" | 16 mm | 24 mm | 24 mm |
| | Stainless Steel | | mm | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Min. Diameter of Tensioning Idler Running on Back of Belt | Steel and Kevlar | | in/mm | 1.125"/30 mm | 2.375"/60 mm | 3.125"/80 mm | 2.375"/60 mm | 5.875"/150 mm | 1.125"/30 mm | 2.375"/60 mm | 2.375"/60 mm |
| | Stainless Steel | | in/mm | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A |
| Available in FDA Compliant Construction (85 Shore A Urethane) | | | Yes | Yes | Yes | | | Yes | | | |
| Standard Colors (N=Natural, W=White) | | | N | N | N,W | N | N | N,W | W | W | |

Calculating Belt Weight

Imperial Units

Belt Weight = (Specific Belt Wt, lbf/ft/in) x (Belt Length, ft) x (Belt Width, in)

e.g. 200 ft of H600, Steel Cord

Belt Weight = 79 lbs = (0.066 lbf/ft/in) x (200 ft) x (6 in)

Metric Units

Belt Weight = (Specific Belt Wt, kgf/m/cm) x (Belt Length, m) x (Belt Width, cm)

e.g. 100 meters of 150T10, Steel Cord

Belt Weight = 111 kg = (0.074kgf/m/cm) x (100 m) x (15 cm)

Service Temperature Range

-5° C to 70° C (23° F to 158° F)

Hardness

92 Shore A - Standard PU, 85 Shore A - FDA Compliant PU

Coefficient of Friction

Urethane vs. UHMWPE (dry)

Urethane vs. Steel (dry) 0.5 to 0.7

Urethane vs. Aluminum (dry) 0.5 to 0.6

Urethane vs. UHMWPE (dry) 0.2 to 0.4

Nylon vs. Steel (dry) 0.2 to 0.4

Nylon vs. UHMWPE (dry) 0.1 to 0.3


| T10 | T10-HF | AT10 | ATL10 | ATL10-HF | T20 | AT20 | ATL20 | HTD5 | HTD8 | HTD14 | HTDL14 | STD5 | STD8 |
|--------------|--------------|--------------|---------------|---------------|--------------|---------------|---------------|--------------|--------------|---------------|---------------|--------------|--------------|
| 10 mm | 10 mm | 10 mm | 10 mm | 10 mm | 20 mm | 20 mm | 20 mm | 5 mm | 8 mm | 14 mm | 14 mm | 5 mm | 8 mm |
| 1605 | 2369 | 3204 | 5445 | 6059 | 3204 | 5445 | 7913 | 2369 | 3204 | 4667 | 7848 | 2369 | 3204 |
| 7140 | 10540 | 14250 | 24220 | 26950 | 14250 | 24220 | 35200 | 10540 | 14250 | 20760 | 34909 | 10540 | 14250 |
| 1818 | N/A | 3639 | N/A | N/A | 3639 | 4900 | N/A | 1818 | 3639 | 4200 | N/A | 1818 | 3639 |
| 8085 | N/A | 16185 | N/A | N/A | 16185 | 21798 | N/A | 8085 | 16185 | 18684 | N/A | 8085 | 16185 |
| N/A | N/A | 2403 | N/A | N/A | 2403 | N/A | N/A | N/A | 2403 | N/A | N/A | N/A | N/A |
| N/A | N/A | 10687 | N/A | N/A | 10687 | N/A | N/A | N/A | 10687 | N/A | N/A | N/A | N/A |
| 429 | 526 | 841 | 1317 | 1142 | 841 | 1317 | 1732 | 526 | 841 | 1159 | 1718 | 526 | 841 |
| 1908 | 2340 | 3741 | 5860 | 5079 | 3741 | 5860 | 7705 | 2340 | 3741 | 5156 | 7641 | 2340 | 3741 |
| 215 | 263 | 421 | 421 | 421 | 421 | 659 | N/A | 263 | 421 | 580 | N/A | 263 | 421 |
| 954 | 1170 | 1870 | 1870 | 1870 | 1870 | 2930 | N/A | 1170 | 1870 | 2578 | N/A | 1170 | 1870 |
| 239 | N/A | 393 | N/A | N/A | 393 | 393 | N/A | 239 | 393 | 341 | N/A | 239 | 393 |
| 1063 | N/A | 1750 | N/A | N/A | 1750 | 1750 | N/A | 1063 | 1750 | 1515 | N/A | 1063 | 1750 |
| 179 | N/A | 295 | N/A | N/A | 295 | 295 | N/A | 179 | 295 | 255 | N/A | 179 | 295 |
| 797 | N/A | 1312 | N/A | N/A | 1312 | 1312 | N/A | 797 | 1312 | 1136 | N/A | 797 | 1312 |
| N/A | N/A | 631 | N/A | N/A | 631 | N/A | N/A | N/A | 631 | N/A | N/A | N/A | N/A |
| N/A | N/A | 2805 | N/A | N/A | 2805 | N/A | N/A | N/A | 2805 | N/A | N/A | N/A | N/A |
| N/A | N/A | 315 | N/A | N/A | 315 | N/A | N/A | N/A | 315 | N/A | N/A | N/A | N/A |
| N/A | N/A | 1402 | N/A | N/A | 1402 | N/A | N/A | N/A | 1402 | N/A | N/A | N/A | N/A |
| 380 | 380 | 580 | 580 | 580 | 710 | 1221 | 1221 | 229 | 420 | 771 | 771 | 220 | 409 |
| 1690 | 1690 | 2580 | 2580 | 2580 | 3160 | 5430 | 5430 | 1020 | 1870 | 3430 | 3430 | 980 | 1820 |
| 0.074 | 0.079 | 0.096 | 0.114 | 0.118 | 0.125 | 0.169 | 0.185 | 0.07 | 0.101 | 0.182 | 0.21 | 0.067 | 0.087 |
| 0.043 | 0.046 | 0.056 | 0.067 | 0.069 | 0.073 | 0.099 | 0.108 | 0.041 | 0.059 | 0.107 | 0.123 | 0.039 | 0.051 |
| 0.062 | N/A | 0.071 | N/A | N/A | 0.101 | 0.124 | N/A | 0.05 | 0.08 | 0.143 | N/A | 0.05 | 0.074 |
| 0.036 | N/A | 0.042 | N/A | N/A | 0.059 | 0.073 | N/A | 0.029 | 0.047 | 0.084 | N/A | 0.029 | 0.043 |
| N/A | N/A | 0.096 | N/A | N/A | 0.125 | N/A | N/A | N/A | 0.101 | N/A | N/A | N/A | N/A |
| N/A | N/A | 0.056 | N/A | N/A | 0.073 | N/A | N/A | N/A | 0.059 | N/A | N/A | N/A | N/A |
| 109000 | 133600 | 213600 | 334600 | 290000 | 213600 | 334600 | 440000 | 133600 | 213600 | 294400 | 440000 | 133600 | 213600 |
| 19085 | 23400 | 37410 | 58600 | 50790 | 37410 | 58600 | 77050 | 23400 | 37410 | 51560 | 77050 | 23400 | 37410 |
| 60700 | N/A | 100000 | N/A | N/A | 100000 | 100000 | N/A | 60700 | 100000 | 86500 | N/A | 60700 | 100000 |
| 10635 | N/A | 17500 | N/A | N/A | 17500 | 17500 | N/A | 10635 | 17500 | 15150 | N/A | 10635 | 17500 |
| N/A | N/A | 160212 | N/A | N/A | 160212 | N/A | N/A | N/A | 160212 | N/A | N/A | N/A | N/A |
| N/A | N/A | 28057 | N/A | N/A | 28057 | N/A | N/A | N/A | 28057 | N/A | N/A | N/A | N/A |
| 14 | 12 | 15 | 25 | 20 | 15 | 18 | 30 | 14 | 20 | 28 | 43 | 14 | 20 |
| N/A | N/A | 20 | N/A | N/A | 20 | N/A | N/A | N/A | 25 | N/A | N/A | N/A | N/A |
| 45 mm | 38 mm | 48 mm | 80 mm | 64 mm | 96 mm | 115 mm | 191 mm | 22 mm | 51 mm | 125 mm | 191 mm | 22 mm | 51 mm |
| N/A | N/A | 64 mm | N/A | N/A | 127 mm | N/A | N/A | N/A | 64 mm | N/A | N/A | N/A | N/A |
| 3.125"/80 mm | 2.375"/60 mm | 4.75"/120 mm | 5.875"/150 mm | 5.125"/130 mm | 4.75"/120 mm | 7.125"/180 mm | 9.875"/250 mm | 2.375"/60 mm | 4.75"/120 mm | 7.875"/200 mm | 9.875"/250 mm | 2.375"/60 mm | 4.75"/120 mm |
| N/A | N/A | 6.25"/160 mm | N/A | N/A | 6.25"/160 mm | N/A | N/A | N/A | 6.00"/150 mm | N/A | N/A | N/A | N/A |
| Yes | | | | | | | | | | | | | |
| N,W | N | W | W | W | N,W | W | W | W | W | W | W | W | W |

The specifications listed are based on Gates Mectrol's experience. However, our specifications and data do NOT cover all possible belt drive conditions. It is the responsibility of the belt drive system designer to ensure Gates Mectrol's belts are appropriate for a given system and application. The provided data is representative of our in-house experience and does not necessarily match product performance in industrial use. Gates Mectrol cannot assume any liability concerning the suitability and process ability of our products. We also cannot assume liability for process results, damages or consequential damages associated with the use of our products. Note, ultimate tensile strengths are listed for references purposes only. Ultimate tensile strength values listed above are a theoretical calculation based on average cord strength and may not represent actual tensile test results.

- HF designates high flex cords.
- Most belts are available with Nylon Fabric on either or both sides.
 For Nylon on the tooth side, specify "NT"
 For Nylon on the back side, specify "NB"
 For Nylon on both sides, specify "NTB"
 Note: Nylon on tooth side is NOT available on HTD5 Steel or Kevlar in widths greater than 50 mm.
- Belting produced to specific length tolerance is available upon request.
- Many linear positioning applications require belts of a specific length tolerance, or a "minus pitch tolerance." Gates Mectrol can produce belts to specific minus tolerances. Consult a Gates Mectrol Applications Engineer to determine the proper length tolerance calculation.

Imperial Pitch Belts


XL .200" Pitch

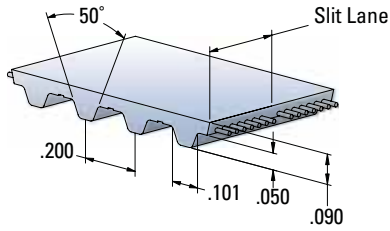

| | | XL | L | H*, H-HF* | XH |
|--------------------------|--------|-----|-----|--------------------------------------|-------|
| Min. Welded Belt Length | inch | 17 | 17 | 17 (4" wide) 33.5 (6" wide) | 40.25 |
| | feet | 200 | 200 | 200 | 100 |
| Standard Roll Lengths | meters | 61 | 61 | 61 | 30 |
| | inch | 1/4 | 1/2 | 1.0 | 1.0 |
| Standard Slitting Lanes | inch | 1/4 | 1/2 | 1.0 | 1.0 |
| Available Slitting Lanes | inch | N/A | N/A | 3/4 | N/A |

All roll lengths are $\pm 1\%$.
*Heavy Back (HB) option available.

L .375" Pitch

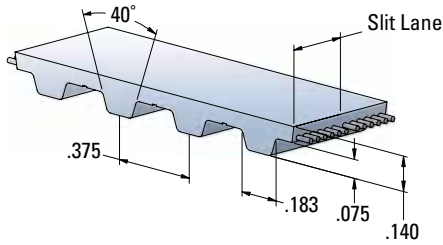


Available Widths

| Code | inch | mm | XL | L | H, H-HF | XH |
|------|-------|-------|----|---|---------|----|
| 025 | 1/4 | 6.35 | X | | | |
| 031 | 5/16 | 7.94 | X | | | |
| 037 | 3/8 | 9.53 | X | X | X | |
| 050 | 1/2 | 12.7 | X | X | X | X |
| 075 | 3/4 | 19.05 | X | X | X | X |
| 100 | 1 | 25.4 | X | X | X | X |
| 150 | 1 1/2 | 38.1 | X | X | X | X |
| 200 | 2 | 50.8 | X | X | X | X |
| 300 | 3 | 76.2 | | X | X | X |
| 400 | 4 | 101.6 | | X | X | X |
| 600 | 6 | 152.4 | | | X | X |

All belts are available in any width between the minimum and maximum listed width.


H, H-HF .500" Pitch
WH .500" Pitch—From 6" to 18" wide

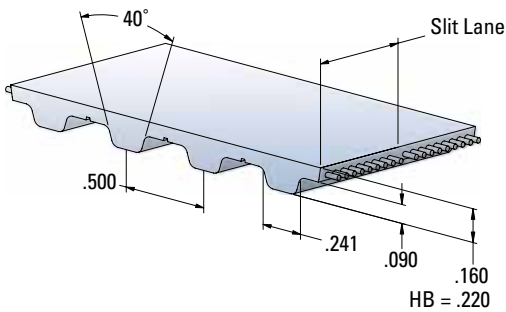

Width Tolerances

| Width | XL | L | H, H-HF | XH |
|-----------|-------------|-------------|-------------|-------------|
| Up to 2" | $\pm .020"$ | $\pm .020"$ | $\pm .020"$ | $\pm .040"$ |
| > 2" - 4" | N/A | $\pm .030"$ | $\pm .030"$ | $\pm .040"$ |
| > 4" - 6" | N/A | N/A | $\pm .030"$ | $\pm .040"$ |

XH .875" Pitch

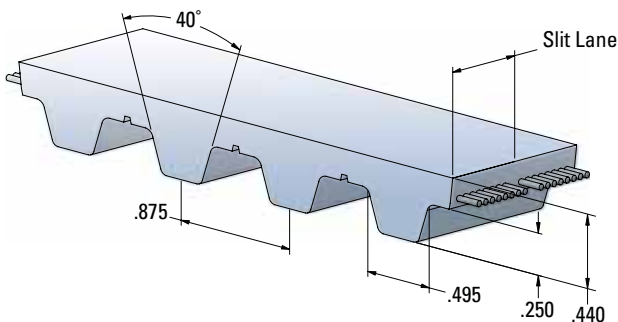

To Order Imperial Pitch Belts

600 H 200 () ()

Insert "NT" for Nylon Teeth, "NB" for Nylon Back, "NTB" for Nylon on Both Sides, "HB" for Heavy Backing, "FDA" for FDA

Insert "K" if specifying Kevlar


Width: 2.0" x 100 = 200

Pitch: H (1/2")


Length: 60.0" x 10 = 600

T Pitch Belts


T5 5 mm Pitch



T10, T10-HF 10 mm Pitch WT10 10 mm Pitch from 150 to 450 mm wide

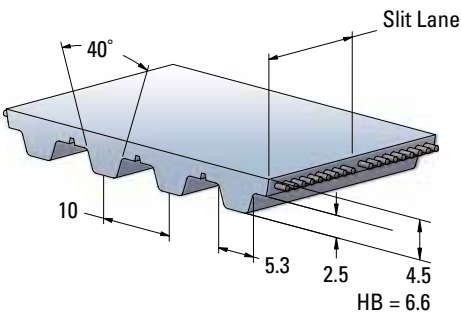

T20 20 mm Pitch

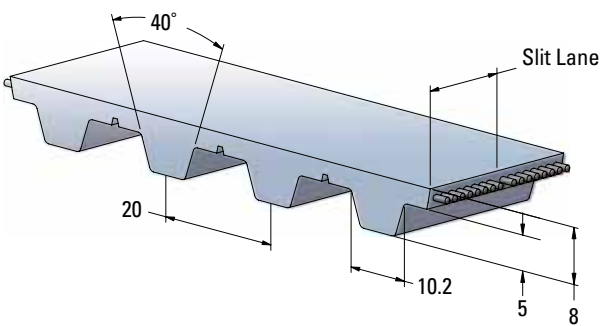

| | | T5 | T10*, T10-HF* | T20 |
|--------------------------|--------|---|--|------|
| Min. Welded Belt Length | mm | 440 (50 mm wide) 450 (100 mm wide) | 450 (100 mm wide) 850 (150 mm wide) | 1000 |
| Standard Roll Lengths | meters | 100 | 100 | 50 |
| Standard Slitting Lanes | mm | 25 | 25 | 25 |
| Available Slitting Lanes | mm | 10, 16 | 16, 32 | N/A |

All roll lengths are $\pm 1\%$.

*Heavy Back (HB) option available.

Available Widths

| mm | T5 | T10, T10-HF | T20 |
|-----|----|-------------|-----|
| 6 | X | | |
| 10 | X | X | |
| 12 | X | X | |
| 16 | X | X | |
| 20 | X | X | |
| 25 | X | X | X |
| 32 | X | X | X |
| 50 | X | X | X |
| 75 | X | X | X |
| 100 | X | X | X |
| 150 | | X | X |

All belts are available in any width between the minimum and maximum listed width.

Width Tolerances

| Width | T5 | T10, T10-HF | T20 |
|--------------|---------------|---------------|--------------|
| Up to 50 mm | ± 0.5 mm | ± 0.5 mm | ± 1.0 mm |
| > 50-100 mm | ± 0.75 mm | ± 0.75 mm | ± 1.0 mm |
| > 100-150 mm | N/A | ± 0.75 mm | ± 1.0 mm |

To Order T Pitch Belts

50 T10 1080 () ()

Insert "NT" for Nylon Teeth, "NB" for Nylon Back, "NTB" for Nylon on Both Sides, "HB" for Heavy Backing, "FDA" for FDA

Insert "K" if specifying Kevlar


Length: 1080 (108 Teeth x 10 mm)

Pitch: T10 (10 mm)

Width: 50 mm

AT Pitch Belts


AT5 and ATL5 5 mm Pitch



| | | AT5 | ATL5 | AT10 | ATL10, ATL10-HF | AT20, ATL20 |
|--------------------------|--------|--------|------|--|-----------------|-------------|
| Min. Welded Belt Length | mm | 440 | 450 | 460 (100 mm wide) 860 (150 mm wide) | 900 | 1000 |
| Standard Roll Lengths | meters | 100 | 100 | 100 | 100 | 50 |
| Standard Slitting Lanes | mm | 25 | 25 | 25 | 25 | N/A |
| Available Slitting Lanes | mm | 10, 16 | 16 | N/A | N/A | N/A |

All roll lengths are $\pm 1\%$.

AT10, ATL10, and ATL10-HF 10 mm Pitch

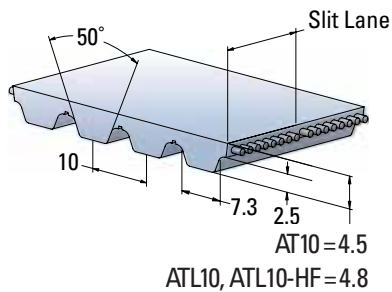


Available Widths

| mm | AT5 | ATL5 | AT10, ATL10, ATL10-HF | AT20, ATL20 |
|-----|-----|------|-----------------------|-------------|
| 6 | X | | | |
| 10 | X | X | | |
| 12 | X | X | | |
| 16 | X | X | X | |
| 20 | X | X | X | |
| 25 | X | X | X | X |
| 32 | X | X | X | X |
| 50 | X | X | X | X |
| 75 | X | X | X | X |
| 100 | X | X | X | X |
| 150 | | X | X | X |

All belts are available in any width between the minimum and maximum listed width.

AT20 and ATL20 20 mm Pitch

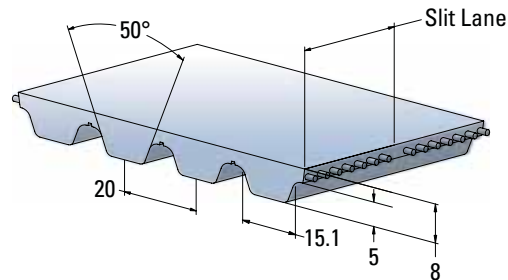

Width Tolerances

| Width | AT5 | ATL5 | AT10 | ATL10, ATL10-HF | AT20 | ATL20 |
|--------------|---------------|---------------|---------------|-----------------|--------------|--------------|
| Up to 50 mm | ± 0.5 mm | ± 0.5 mm | ± 0.75 mm | ± 1.0 mm | ± 1.0 mm | ± 2.0 mm |
| > 50-100 mm | ± 0.75 mm | ± 0.75 mm | ± 1.0 mm | ± 1.5 mm | ± 1.5 mm | ± 2.0 mm |
| > 100-150 mm | N/A | ± 0.75 mm | ± 1.0 mm | ± 1.5 mm | ± 1.5 mm | ± 2.0 mm |


To Order AT Pitch Belts

50 AT10 1080 () ()


_____ Insert "NT" for Nylon Teeth, "NB" for Nylon Back, "NTB" for Nylon on Both Sides
 _____ Insert "K" if specifying Kevlar
 _____ Length: 1080 (108 Teeth x 10 mm)
 _____ Pitch: AT10 (10 mm)
 _____ Width: 50 mm

HTD[®] and STD Pitch Belts


HTD5 5 mm Pitch




HTD8 8 mm Pitch

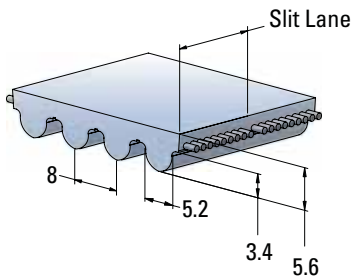


HTD14, HTDL14 14 mm Pitch

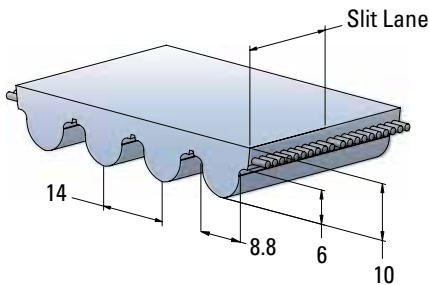

STD5 5 mm Pitch



STD8 8 mm Pitch



| | | HTD5 | HTD8 | HTD14, HTDL14 | STD5 | STD8 |
|--------------------------|--------|------|--------------|------------------|--------|--------------|
| Min. Welded Belt Length | mm | 450 | 456 | 1000 | 450 | 456 |
| Standard Roll Lengths | meters | 100 | 100 | 50 | 100 | 100 |
| Standard Slitting Lanes | mm | 25 | No Slit Lane | 55 | 25 | No Slit Lane |
| Available Slitting Lanes | mm | 15 | 20, 25, 30 | 85 | 10, 15 | 25 |

All roll lengths are ±1%.

Available Widths

| mm | HTD5 | HTD8 | HTD14, HTDL14 | STD5 | STD8 |
|-----|------|------|------------------|------|------|
| 5 | X | | | X | |
| 10 | X | X | | X | X |
| 15 | X | X | | X | X |
| 20 | | X | | | X |
| 25 | X | X | X | X | X |
| 30 | | X | | | X |
| 40 | | | X | | |
| 50 | X | X | | X | X |
| 55 | | | X | | |
| 85 | X* | X | X | | X |
| 100 | X* | X | X | | X |
| 115 | | | X | | |
| 150 | X* | X** | | | |
| 170 | | | X | | |

All belts are available in any width between the minimum and maximum listed width.

* These widths are only available in HTD5 Steel or HTD5 Steel with NB.

** This width is not available in HTD8 Kevlar.

Width Tolerances

| Width | HTD5 | HTD8 | HTD14, HTDL14 | STD5 | STD8 |
|--------------|----------|----------|------------------|---------|----------|
| Up to 50 mm | ±0.5 mm | ±0.75 mm | ±1.0 mm | ±0.5 mm | ±0.75 mm |
| > 50-100 mm | ±0.75 mm | ± 1.0 mm | ±1.5 mm | N/A | ± 1.0 mm |
| > 100-150 mm | ±0.75 mm | ± 1.0 mm | ±2.0 mm | N/A | N/A |
| > 150-170 mm | N/A | N/A | ±2.0 mm | N/A | N/A |

To Order HTD and STD Pitch Belts

25 HTD5M 1000 () ()

- Insert "NT" for Nylon Teeth, "NB" for Nylon Back, "NTB" for Nylon on Both Sides
- Insert "K" if specifying Kevlar
- Length: 1000 mm
- Pitch: HTD5 (5 mm)
- Width: 25 mm

Self Tracking Belts

Notched V-Guide – Allows Maximum Flexibility


Gates Mectrol self tracking timing belts have all the capabilities of standard urethane timing belts but utilize guides to eliminate any lateral movement. Our range of specially designed urethane V-guides are notched along the belt length to provide optimum flexibility around pulleys.

Gates Mectrol manufactures V-guided belts in two constructions — **fabricated**, any of four V-guides can be added to any pitch belt in any width, length combination, or — **integral**, the V-guide is integrally molded to specific belt pitches for greater strength and consistency.

Features

- V-guides can be added to virtually any of our belts, eliminating the need for flanged pulleys
- Notched construction for extra flexibility around tight belt paths
- Produced with the same durable urethane as the base belt
- Different sizes available to serve any application requirement
- Integrally produced with the belt for durability or fabricated to fit onto our existing belts

Fabricated V-Guides

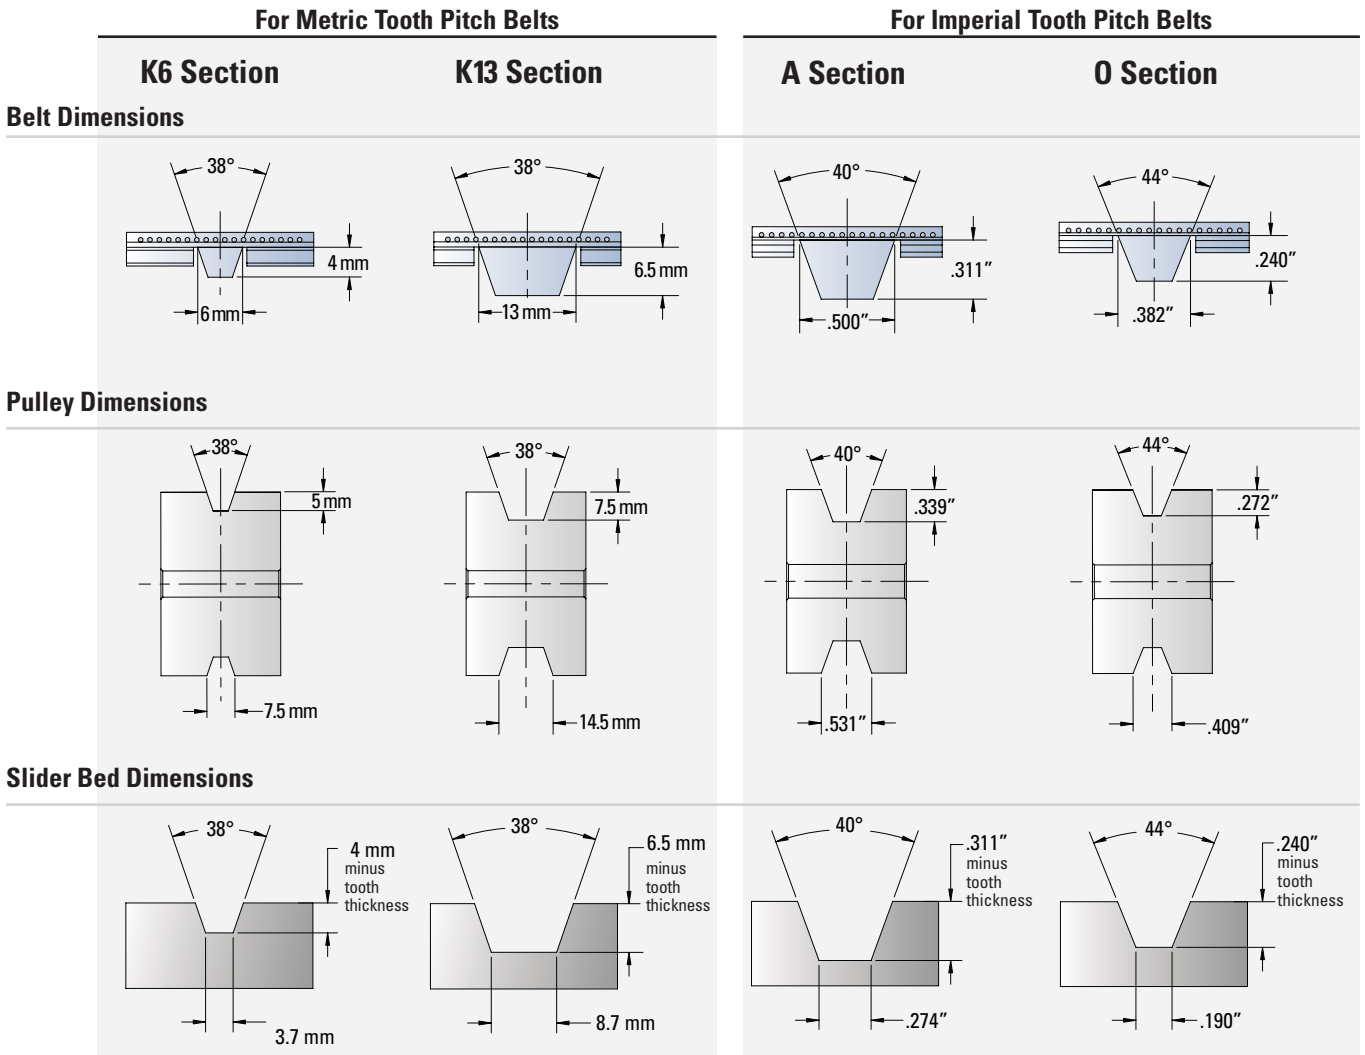

Application Characteristics

- Long length conveying or linear positioning where tracking is an issue
- Conveying applications where design considerations prevent the use of pulley flanges
- Reduce or eliminate any belt “wander” by providing continuous guiding along conveyor length

Integral V-Guides


| | | T5V | T10VS | T10V | AT5V | ATL5V | AT10V | HV |
|-------------------------|--------|-----|-------|------|------|-------|-------|-----|
| Min. Welded Belt Length | inch | | | | | | | 36 |
| | mm | 920 | 900 | 900 | 900 | N/A | 950 | |
| Standard Roll Length | feet | | | | | | | 200 |
| | meters | 100 | 100 | 100 | 100 | 100 | 100 | |
| Standard Slitting Lanes | inch | | | | | | | 1 |
| | mm | 25 | 25 | 25 | 25 | 25 | 25 | |

All roll lengths are ±1%.

Width Tolerances


| Width | T5V | T10VS | T10V | AT5V | ATL5V | AT10V | HV |
|---------------------------------|----------|---------|----------|---------|---------|----------|-----------|
| Up to 50 mm Up to 2" | ±0.5 mm | ±0.5 mm | ±0.5 mm | ±0.5 mm | ±0.5 mm | ±0.75 mm | ±0.020 in |
| >50 - 100 mm >2" - 4" | ±0.75 mm | N/A | ±0.75 mm | N/A | N/A | ±1.0 mm | ±0.030 in |
| >100 mm - 150 mm >4" - 6" | N/A | N/A | ±0.75 mm | N/A | N/A | ±1.0 mm | ±0.030 in |

T5V (K6 Section)




Available widths
– 16, 25, 32, 50, 75, 100 mm

AT5V, ATL5V (K6 Section)




Available widths
– 16, 25, 32, 50 mm

T10VS (K6 Section)

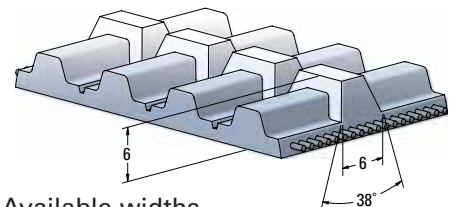


Available widths
– 16, 25, 32, 50 mm

T10V (K13 Section)

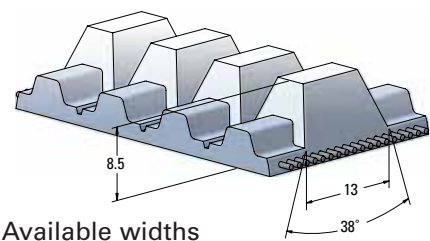


Available widths
– 25, 32, 50, 75, 100, 150 mm

AT10V (K13 Section)

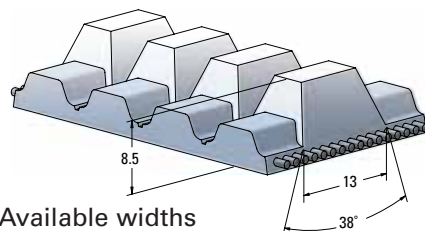

Available widths
– 25, 32, 50, 75 mm

HV (A Section)

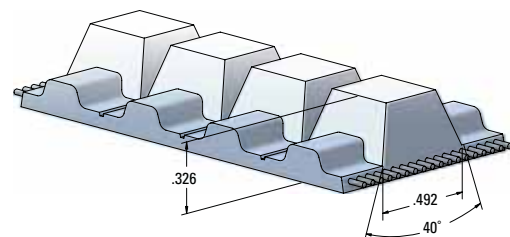

Available widths
– 1.5, 2, 3, 4, 6 inch


Integral V-Guide Belt Specifications

| | | HV | | | | | T5V | | | | | | | |
|--|--------|----------------------------------|--------|--------|---------|---------|---------|--------|--------|--------|--------|--------|--------|------|
| Pitch (Imperial and Metric) | | .500" | | | | | 5 mm | | | | | | | |
| Belt Width | | 1.5" | 2" | 3" | 4" | 6" | 16 mm | 25 mm | 32 mm | 50 mm | 75 mm | 100 mm | | |
| Ultimate Tensile Strength | Steel | lbf | 2455 | 3305 | 5004 | 6704 | 10103 | 450 | 759 | 955 | 1546 | 2332 | 3119 | |
| | | N | 10920 | 14700 | 22260 | 29820 | 44940 | 2000 | 3375 | 4250 | 6875 | 10375 | 13875 | |
| | Kevlar | lbf | 2787 | 4241 | 6422 | 8603 | 12965 | 1115 | 1882 | 2369 | 3833 | 5784 | 7736 | |
| | | N | 12397 | 18865 | 28567 | 38269 | 57673 | 4960 | 8370 | 10540 | 17050 | 25730 | 34410 | |
| Max. Allowable Belt Tension | Steel | Open Ended | lbf | 667 | 897 | 1338 | 1792 | 2700 | 112 | 189 | 238 | 385 | 581 | 776 |
| | | | N | 2966 | 3992 | 5950 | 7971 | 12012 | 498 | 840 | 1058 | 1711 | 2582 | 3453 |
| | | Welded | lbf | 255 | 322 | 547 | 775 | 1225 | 52 | 80 | 98 | 179 | 264 | 340 |
| | | | N | 1135 | 1432 | 2434 | 3447 | 5449 | 232 | 356 | 438 | 796 | 1173 | 1512 |
| | Kevlar | Open Ended | lbf | 372 | 478 | 724 | 970 | 1462 | 122 | 206 | 259 | 419 | 633 | 846 |
| | | | N | 1657 | 2127 | 3221 | 4315 | 6503 | 543 | 916 | 1153 | 1865 | 2814 | 3764 |
| | | Welded | lbf | 213 | 269 | 457 | 648 | 1024 | 52 | 80 | 98 | 179 | 264 | 340 |
| | | | N | 949 | 1197 | 2035 | 2882 | 4555 | 232 | 356 | 438 | 796 | 1173 | 1512 |
| Allowable Effective Tension for Belt Teeth (15 and More Teeth in Mesh) | | lbf | 444 | 664 | 1105 | 1546 | 2427 | 80 | 152 | 208 | 352 | 552 | 752 | |
| | | N | 1976 | 2956 | 4916 | 6876 | 10796 | 356 | 676 | 926 | 1566 | 2456 | 3346 | |
| Belt Weight | Steel | lbf/ft | 0.094 | 0.101 | 0.114 | 0.168 | 0.228 | 0.047 | 0.054 | 0.060 | 0.087 | 0.128 | 0.161 | |
| | | kgf/m | 0.140 | 0.150 | 0.170 | 0.250 | 0.340 | 0.070 | 0.080 | 0.090 | 0.130 | 0.190 | 0.240 | |
| | Kevlar | lbf/ft | 0.081 | 0.087 | 0.101 | 0.141 | 0.195 | 0.040 | 0.047 | 0.054 | 0.081 | 0.114 | 0.148 | |
| | | kgf/m | 0.120 | 0.130 | 0.150 | 0.210 | 0.290 | 0.060 | 0.070 | 0.080 | 0.120 | 0.170 | 0.220 | |
| Belt Stiffness (Open Ended) | Steel | lbf | 163467 | 217955 | 326933 | 435911 | 653866 | 30216 | 47212 | 59452 | 96173 | 141637 | 194095 | |
| | | N | 727139 | 969518 | 1454277 | 1939036 | 2908554 | 134400 | 210000 | 264444 | 427778 | 630000 | 863333 | |
| | Kevlar | lbf | 91048 | 121397 | 182096 | 242794 | 364192 | 32932 | 51456 | 64796 | 104817 | 154367 | 211540 | |
| | | N | 405003 | 540004 | 810006 | 1080008 | 1620012 | 146480 | 228875 | 288213 | 466227 | 686625 | 940931 | |
| Min. No. of Pulley Teeth | | 14 | | | | | 10 | | | | | | | |
| Min. Pitch Diameter (Inch or mm) | | 2.23" | | | | | 16mm | | | | | | | |
| Min. Diameter of Tensioning Idler Running on Back of Belt | | inch | 3.125 | | | | | 1.125 | | | | | | |
| | | mm | 80 | | | | | 30 | | | | | | |
| Available in FDA Compliant Construction (85 Shore A Urethane & Kevlar Cords) | | Yes | | | | | No | | | | | | | |
| Standard Colors (N=Natural, W=White) | | N | | | | | N, W | | | | | | | |
| Nylon Available on Tooth Side (NT) | | Yes | | | | | No | | | | | | | |
| Service Temperature Range | | -5° C to 70° C (23° F to 158° F) | | | | | | | | | | | | |

| AT5V | | | | ATL5V | | | | T10VS | | | | T10V | | | | | AT10V | | | | |
|--------|--------|--------|--------|--------|--------|--------|---------|--------|--------|--------|--------|--------|--------|--------|---------|---------|---------|--------|---------|---------|---------|
| 5 mm | | | | 5 mm | | | | 10 mm | | | | 10 mm | | | | | 10 mm | | | | |
| 16 mm | 25 mm | 32 mm | 50 mm | 16 mm | 25 mm | 32 mm | 50 mm | 16 mm | 25 mm | 32 mm | 50 mm | 25 mm | 32 mm | 50 mm | 75 mm | 100 mm | 150 mm | 25 mm | 32 mm | 50 mm | 75 mm |
| 961 | 1602 | 2050 | 3268 | 1394 | 2369 | 3066 | 4878 | 944 | 1605 | 2077 | 3305 | 1605 | 2077 | 3305 | 5004 | 6704 | 10103 | 3204 | 4058 | 6621 | 10038 |
| 4275 | 7125 | 9120 | 14535 | 6200 | 10540 | 13640 | 21700 | 4200 | 7140 | 9240 | 14700 | 7140 | 9240 | 14700 | 22260 | 29820 | 44940 | 14250 | 18050 | 29450 | 44650 |
| 1126 | 1877 | 2403 | 3829 | N/A | N/A | N/A | N/A | 1091 | 2060 | 2666 | 4241 | 2060 | 2666 | 4241 | 6422 | 8603 | 12965 | 3639 | 4609 | 7520 | 11401 |
| 5010 | 8350 | 10688 | 17034 | N/A | N/A | N/A | N/A | 4851 | 9163 | 11858 | 18865 | 9163 | 11858 | 18865 | 28567 | 38269 | 57673 | 16185 | 20501 | 33449 | 50713 |
| 237 | 396 | 507 | 807 | 309 | 526 | 681 | 1083 | 252 | 429 | 555 | 883 | 429 | 555 | 883 | 1338 | 1792 | 2700 | 841 | 1065 | 1738 | 2635 |
| 1056 | 1761 | 2253 | 3591 | 1376 | 2340 | 3028 | 4818 | 1123 | 1909 | 2470 | 3929 | 1909 | 2470 | 3929 | 5950 | 7971 | 12012 | 3741 | 4739 | 7731 | 11722 |
| 52 | 80 | 98 | 179 | 68 | 105 | 136 | 238 | 131 | 216 | 298 | 455 | 114 | 184 | 328 | 544 | 788 | 1300 | 166 | 263 | 511 | 828 |
| 232 | 356 | 438 | 796 | 303 | 468 | 606 | 1060 | 584 | 959 | 1326 | 2022 | 505 | 820 | 1457 | 2422 | 3505 | 5782 | 738 | 1168 | 2274 | 3684 |
| 163 | 272 | 348 | 555 | N/A | N/A | N/A | N/A | 143 | 239 | 309 | 492 | 239 | 309 | 492 | 745 | 999 | 1505 | 393 | 498 | 813 | 1233 |
| 726 | 1210 | 1549 | 2468 | N/A | N/A | N/A | N/A | 638 | 1064 | 1376 | 2190 | 1064 | 1376 | 2190 | 3316 | 4442 | 6694 | 1750 | 2217 | 3617 | 5483 |
| 52 | 80 | 98 | 179 | N/A | N/A | N/A | N/A | 110 | 180 | 249 | 380 | 95 | 154 | 274 | 455 | 659 | 1086 | 116 | 184 | 359 | 581 |
| 232 | 356 | 438 | 796 | N/A | N/A | N/A | N/A | 488 | 802 | 1108 | 1690 | 422 | 685 | 1218 | 2024 | 2930 | 4833 | 518 | 820 | 1596 | 2585 |
| 116 | 220 | 302 | 510 | 116 | 220 | 302 | 510 | 152 | 289 | 395 | 669 | 182 | 289 | 562 | 942 | 1322 | 2082 | 278 | 441 | 858 | 1438 |
| 516 | 980 | 1342 | 2270 | 516 | 980 | 1342 | 2270 | 676 | 1284 | 1758 | 2974 | 811 | 1284 | 2501 | 4191 | 5881 | 9261 | 1238 | 1961 | 3818 | 6398 |
| 0.054 | 0.067 | 0.081 | 0.121 | 0.054 | 0.074 | 0.094 | 0.134 | 0.053 | 0.081 | 0.103 | 0.158 | 0.114 | 0.134 | 0.195 | 0.275 | 0.356 | 0.517 | 0.128 | 0.154 | 0.222 | 0.316 |
| 0.080 | 0.100 | 0.120 | 0.180 | 0.080 | 0.110 | 0.140 | 0.200 | 0.080 | 0.121 | 0.153 | 0.235 | 0.170 | 0.200 | 0.290 | 0.410 | 0.530 | 0.770 | 0.190 | 0.230 | 0.330 | 0.470 |
| 0.047 | 0.060 | 0.074 | 0.107 | N/A | N/A | N/A | N/A | 0.046 | 0.069 | 0.087 | 0.134 | 0.094 | 0.114 | 0.154 | 0.215 | 0.275 | 0.396 | 0.107 | 0.121 | 0.175 | 0.248 |
| 0.070 | 0.090 | 0.110 | 0.160 | N/A | N/A | N/A | N/A | 0.068 | 0.103 | 0.130 | 0.200 | 0.140 | 0.170 | 0.230 | 0.320 | 0.410 | 0.590 | 0.160 | 0.180 | 0.260 | 0.370 |
| 59369 | 98949 | 126655 | 201856 | 77361 | 131513 | 170194 | 270763 | 63095 | 107262 | 138810 | 220834 | 107262 | 138810 | 220834 | 334405 | 447977 | 675120 | 210253 | 266320 | 434522 | 658792 |
| 264075 | 440125 | 563360 | 897855 | 344118 | 585000 | 757059 | 1204412 | 280662 | 477125 | 617456 | 982316 | 477125 | 617456 | 982316 | 1487507 | 1992699 | 3003081 | 935250 | 1184650 | 1932850 | 2930450 |
| 40805 | 68008 | 87050 | 138737 | N/A | N/A | N/A | N/A | 35863 | 59771 | 77351 | 123058 | 59771 | 77351 | 123058 | 186345 | 249632 | 376206 | 98354 | 124582 | 203265 | 308176 |
| 181500 | 302500 | 387200 | 617100 | N/A | N/A | N/A | N/A | 159525 | 265875 | 344074 | 547390 | 265875 | 344074 | 547390 | 828904 | 1110419 | 1673449 | 437500 | 554167 | 904167 | 1370833 |
| 15 | | | | 15 | | | | 14 | | | | 14 | | | | | 15 | | | | |
| 24 mm | | | | 24 mm | | | | 45 mm | | | | 45 mm | | | | | 48 mm | | | | |
| 2.375 | | | | 2.375 | | | | 3.125 | | | | 3.125 | | | | | 4.750 | | | | |
| 60 | | | | 60 | | | | 80 | | | | 80 | | | | | 120 | | | | |
| No | | | | No | | | | No | | | | Yes | | | | | No | | | | |
| W | | | | W | | | | N | | | | N | | | | | W | | | | |
| No | | | | No | | | | No | | | | Yes | | | | | Yes | | | | |

-5° C to 70° C (23° F to 158° F)

The specifications listed are based on Gates Mectrol's experience. However, our specifications and data do NOT cover all possible belt drive conditions. It is the responsibility of the belt drive system designer to ensure Gates Mectrol's belts are appropriate for a given system and application. The provided data is representative of our in-house experience and does not necessarily match product performance in industrial use. Gates Mectrol cannot assume any liability concerning the suitability and process ability of our products. We also cannot assume liability for process results, damages or consequential damages associated with the use of our products. Note, ultimate tensile strengths are listed for references purposes only. Ultimate tensile strength values listed above are a theoretical calculation based on average cord strength and may not represent actual tensile test results.

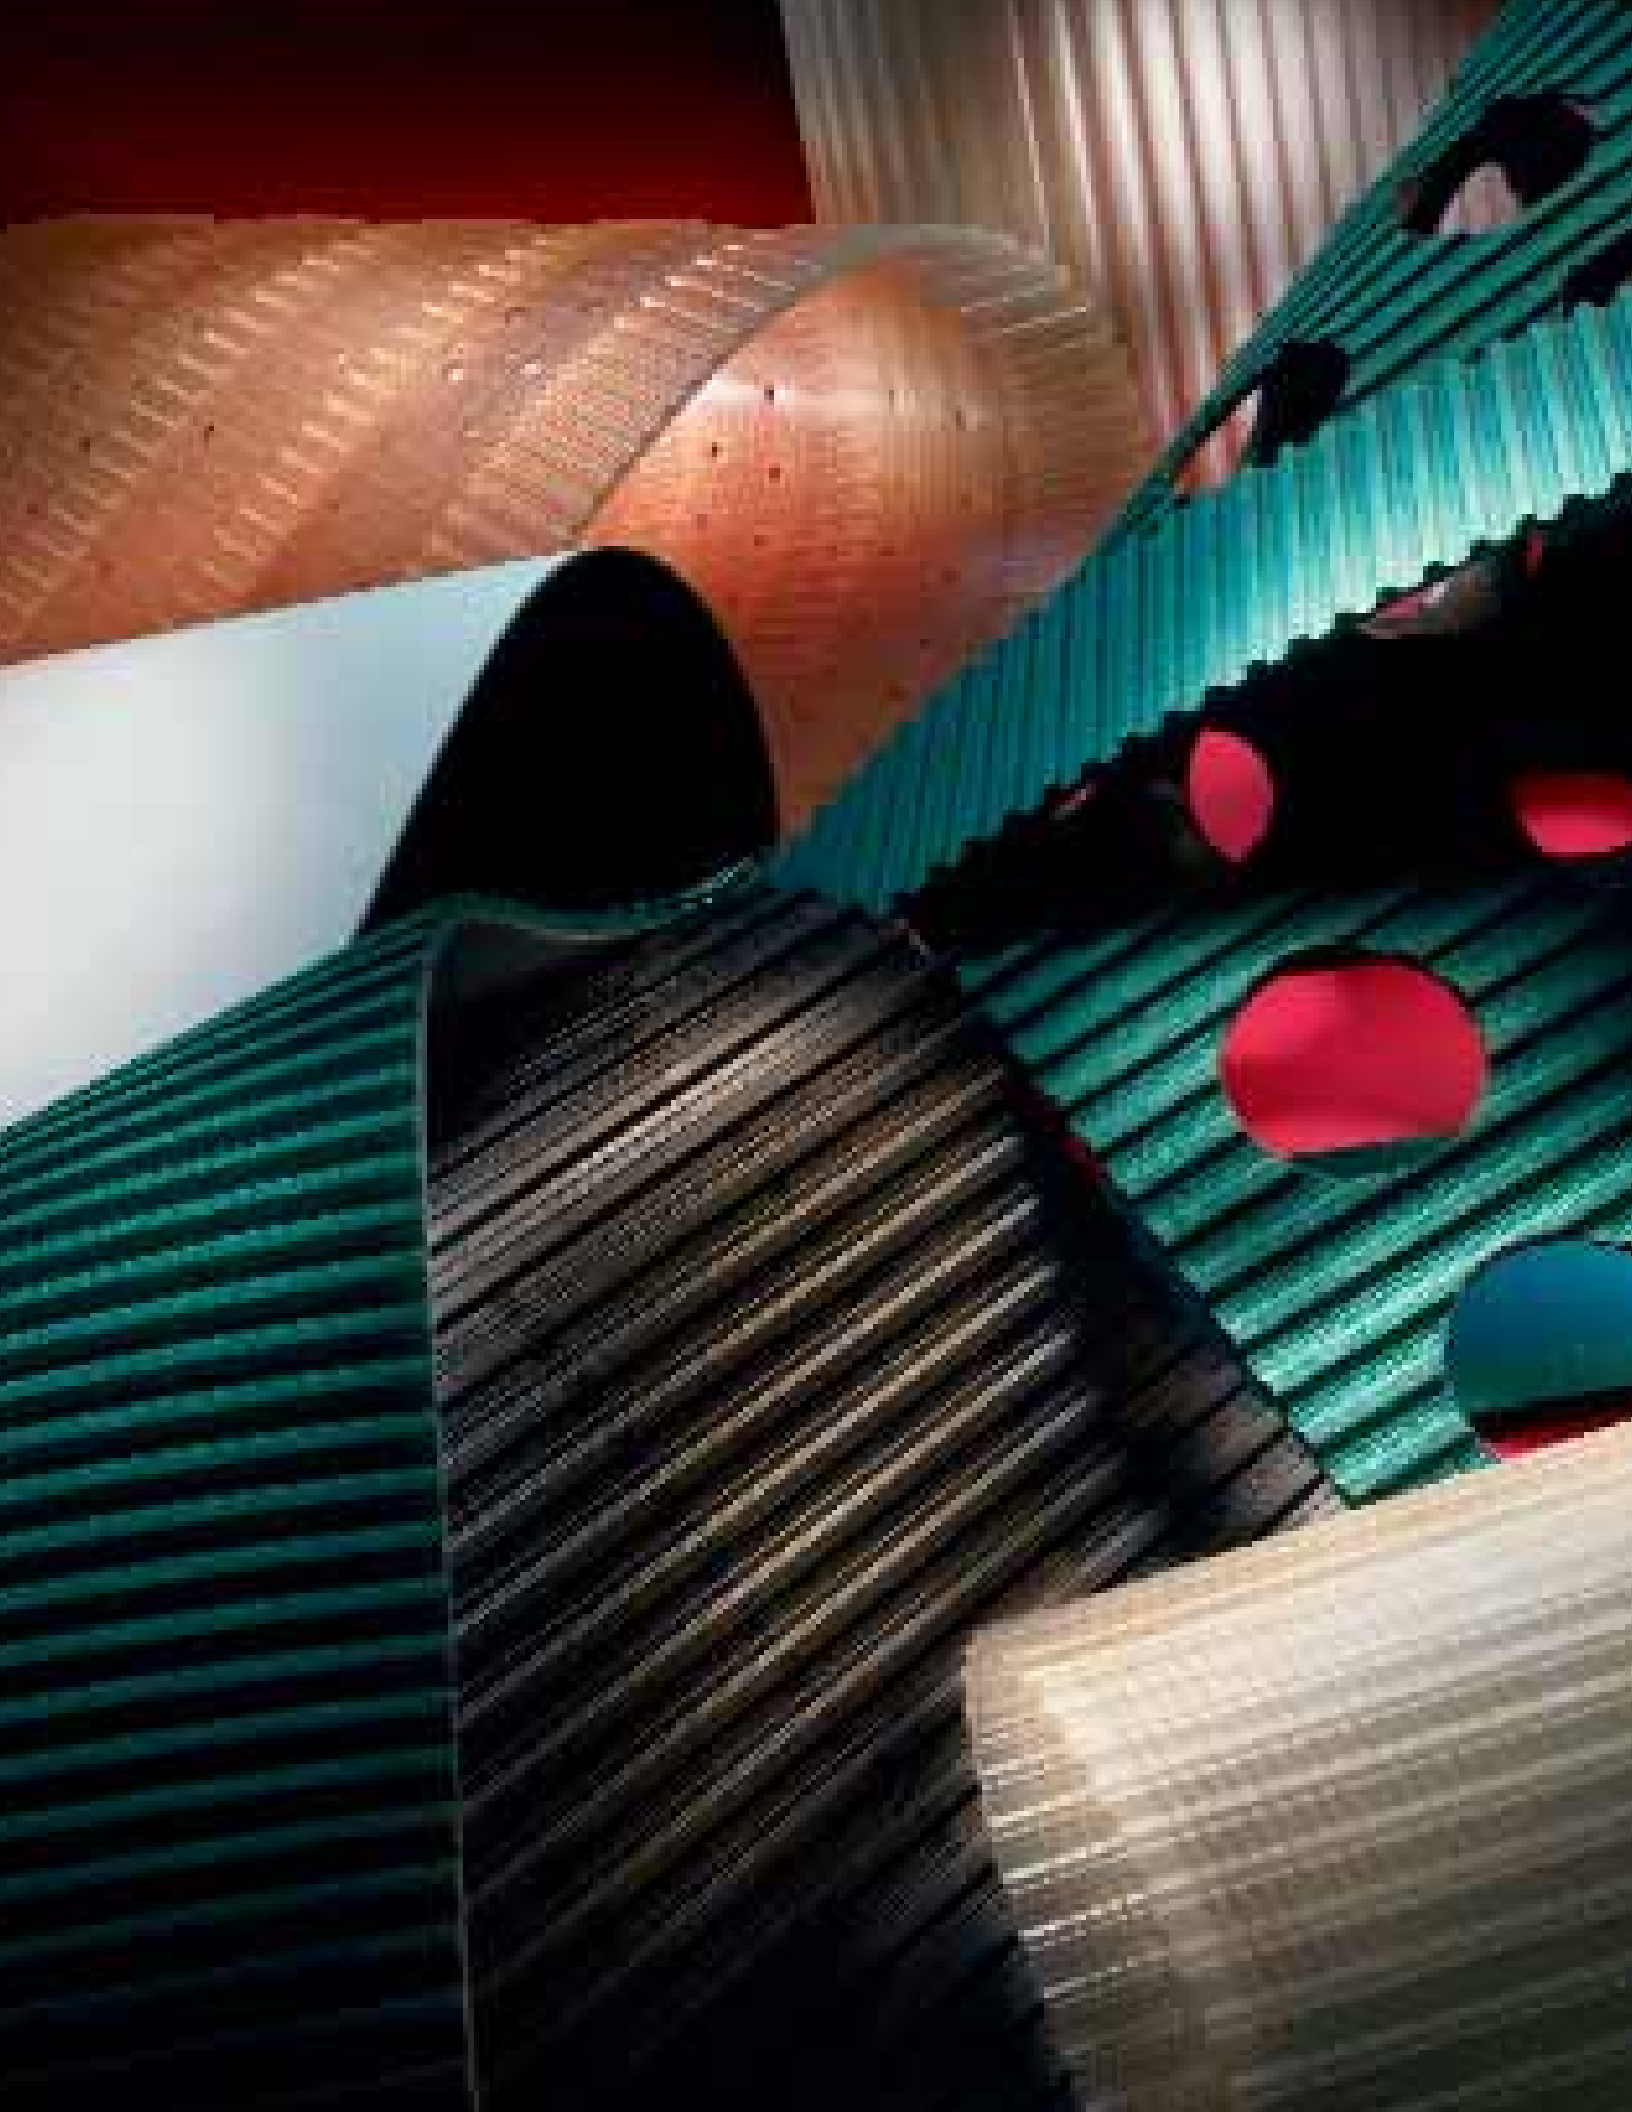

Wide Belt Overview

Gates Mectrol can manufacture urethane timing belts in widths up to 450 mm in several pitches. These belts are specifically designed for synchronous conveying applications.

Wide belts are primarily used as process conveyor belts. Process (or conversion steps) normally occur on the belt, therefore the conveyed product requires additional width.

Application Characteristics

- Replaces flat conveyor belt
 - No retensioning required
 - Lower shaft forces
 - Positive indexing
 - Higher acceleration without slippage
- High speed conveying
- Rapid indexing
- Automated process conveyor belts
- Bulk product conveying

Features

- High strength Kevlar cord construction
- Parallel cord construction
 - No cords exposed at edges of belt
 - Better tracking
 - Uniform tensioning
- Tough polyurethane construction
 - Durable and cut resistant
 - Oil, chemical and water resistant
 - Non-marking
- Choice of polymers including FDA grades
- Nylon back and nylon tooth surface options available for quieter operation and reduced friction
- Various molded profiles and backing materials available
- No lubrication required



Wide belts can move heavier loads, with greater precision and use smaller diameter pulleys than a comparable flat belt.

Wide Belt Specifications


| | | | WH | WT10 | GMT3™ |
|--|--------|-----------------------|----------------|----------------|----------------|
| Pitch (Imperial and metric) | | | .500" | 10 mm | 3 mm |
| Ultimate Tensile Strength per Inch or 25 mm Belt Width | Kevlar | lbf/in N/25 mm | 800 3557 | 800 3557 | 420 1870 |
| Max. Allowable Belt Tension per Inch or 25 mm Belt Width | Welded | lbf/in N/25 mm | 71 315 | 71 315 | 50 220 |
| Allowable Effective Tension for the Belt Teeth (15 and More Teeth in Mesh) | Welded | lbf/in N/25 mm | 330 1470 | 281 1250 | 100 440 |
| Specific Belt Weight | Kevlar | lbf/ft/in kgf/m/cm | 0.056 0.033 | 0.066 0.039 | 0.033 0.020 |
| Specific Belt Stiffness (Open Ended) | Kevlar | lbf/in N/mm | 23983 4200 | 23983 4200 | 14750 2580 |
| Min. No. of Pulley Teeth | | | 14 | 16 | 20 |
| Min. Pitch Diameter (Inch or mm) | | | 2.23" | 51 mm | 19 mm |
| Min. Diameter of Tensioning Idler Running on Back of Belt | | inch mm | 3.12 80 | 3.12 80 | 1.125 30 |
| Available in FDA Compliant Construction (85 Shore A Urethane) | | | Yes | Yes | Yes |
| Standard Colors | | | Natural | Natural | White/PosiBlue |
| Min. Welded Belt Length | | | 33" | 850 mm | 1002 mm |
| Standard Roll Length | | | 200 ft | 60 m | 60 m |
| Standard Slitting Lanes | | | N/A | N/A | 25 mm |
| Min. Width Available | | | 6" | 150 mm | 100 mm |
| Max. Width Available | | | 18" | 450 mm | 450 mm |
| Width Tolerance | | | ± .060" | ± 1.0 mm | ± 1.0 mm |

| | | |
|---------------------------|---|------------|
| Service Temperature Range | -5° C to 70° C (23° F to 158° F) | |
| Hardness | 92 Shore A - Standard PU, 85 Shore A - FDA Compliant PU | |
| Coefficient of Friction | Urethane vs. Steel (dry) | 0.5 to 0.7 |
| | Urethane vs. Aluminum (dry) | 0.5 to 0.6 |
| | Urethane vs. UHMWPE (dry) | 0.2 to 0.4 |
| | Nylon vs. Steel (dry) | 0.2 to 0.4 |
| | Nylon vs. UHMWPE (dry) | 0.1 to 0.3 |

The specifications listed are based on Gates Mectrol's experience. However, our specifications and data do NOT cover all possible belt drive conditions. It is the responsibility of the belt drive system designer to ensure Gates Mectrol's belts are appropriate for a given system and application. The provided data is representative of our in-house experience and does not necessarily match product performance in industrial use. Gates Mectrol cannot assume any liability concerning the suitability and process ability of our products. We also cannot assume liability for process results, damages or consequential damages associated with the use of our products. Note, ultimate tensile strengths are listed for references purposes only. Ultimate tensile strength values listed above are a theoretical calculation based on average cord strength and may not represent actual tensile test results.

Wide Belt – GMT3™

GMT3 timing belt is designed to be an alternative to light weight flat belt. It is ideal for conveying applications involving small pulley diameters or where belt slippage is a concern.

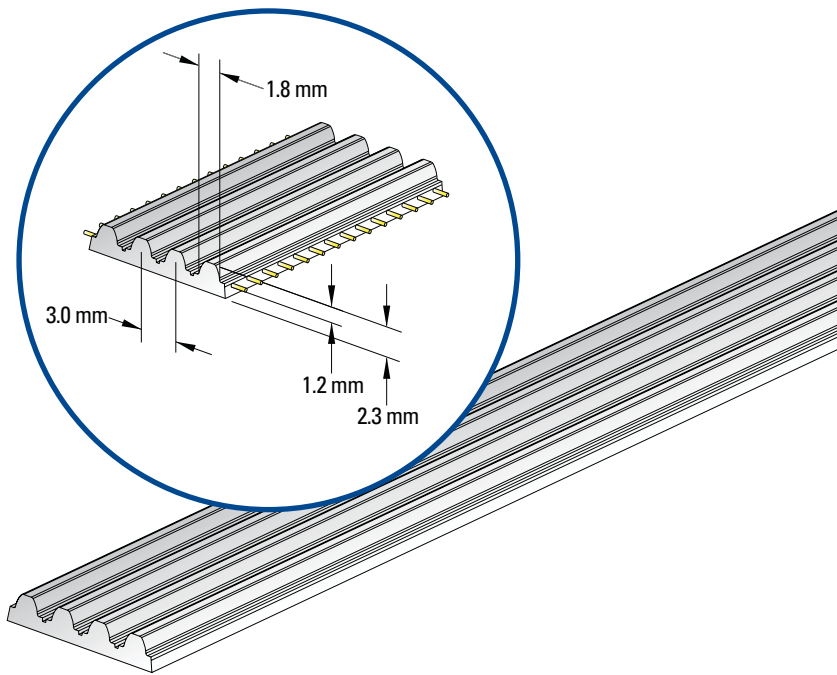

Application Characteristics

- Replaces flat belt
 - No retensioning required
 - Lower shaft forces
 - Higher acceleration without slippage
 - Positive indexing
- Heavy conveying loads with pulley diameters less than 1" (25 mm).
- High conveyor acceleration rates with pulley diameters less than 1" (25 mm)
- Conveying involving small diameter transfers

Features

- 3 mm pitch allows for pulley diameters as small as 0.75" (19 mm)
- Custom tooth profile
 - Designed to minimize noise and run on slider beds
 - Compatible with 3MR GT, 3M HTD and 3M RPP pulleys
- Polyurethane construction meets FDA material requirements for wet food contact
- Kevlar tension members for minimal stretch
- Tension members are not sealed



GMT3 belt is ideal for synchronous conveying applications involving small diameter transfers such as those found in check weighing.

Profiled Belts Overview

Gates Mectrol timing belts can be customized with welded-on profiles to meet your application's specific holding, pushing, lifting, or actuating requirements. These profiles can be molded into almost any shape making profiled belts ideal for your assembly, packaging, inserting and other automation equipment requirements.


Our molded profiles are produced in the same tough urethane as our belting and become an integral part of the belt through thermal bonding.

Features


- Non-marking, durable urethane construction
- Molded and located on the belt to exacting tolerances
- Can be molded to virtually any custom configuration
- Available in 85 and 92 Shore A hardness
- Available in FDA compliant polyurethane
- Thermally fused to base belt material
- Available with metal inserts, including threaded inserts

Application Characteristics

- Pushing, carrying or actuating in packaging applications
- Product location in process applications
- Holders for mounting devices
- Interchangeable spacing for alternate product conveying

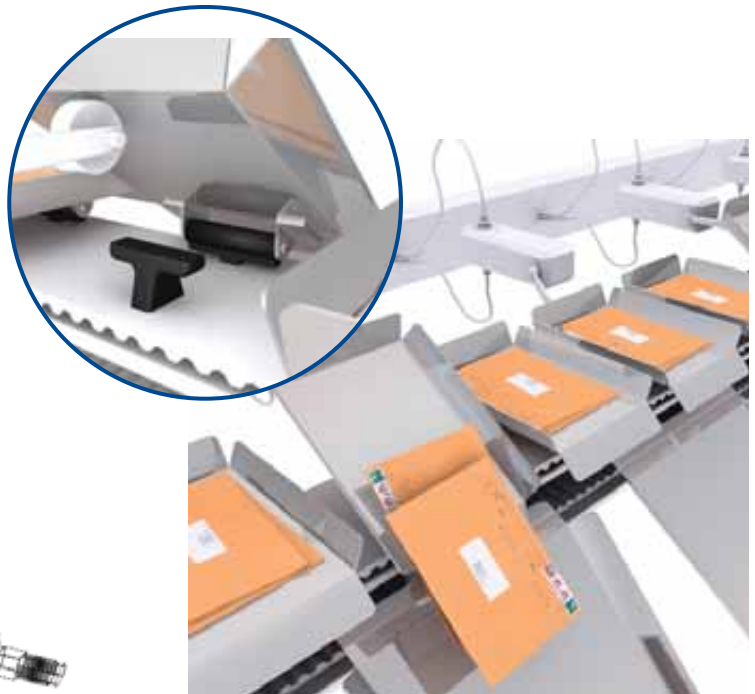

Custom profiles are used for pins and rests on a tilt-tray mail sorting machine.

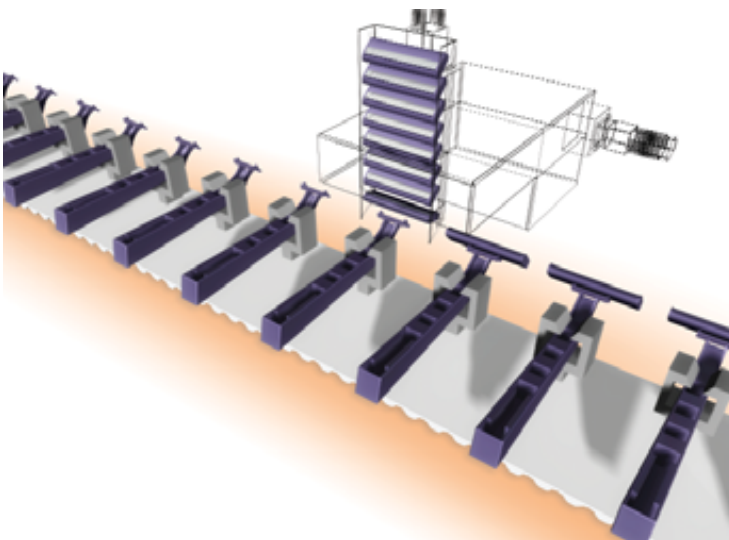

Exact placement of the profile allows for precision assembly of parts. In this application, razor heads are mounted accurately as a result of the Gates Mectrol profiled timing belt.

Profiled Belts – Design Recommendations


Over one thousand profile designs are available from Gates Mectrol's extensive mold inventory. Visit the Gates Mectrol Profile Selector Guide at www.gatesmectrol.com to search our profile library. Our applications engineers can work with you to design any profile to meet your specific requirements. Tooling charges are minimal for most customized designs.

Although it is possible to have nearly any design utilizing welded profiles, ultimate performance for your application can be achieved by following the design guidelines outlined below:

1. Profile Spacing

It is recommended that the profile spacing, A, correspond with the pitch of the belt teeth. This allows for the best spacing tolerances, and minimizes the effects of the belt's overall length tolerance on the profile spacing.

Profiles can be spaced on non-pitch increments. However, if non-pitch spacing is used, the cumulative tolerance of the belt length must be considered.

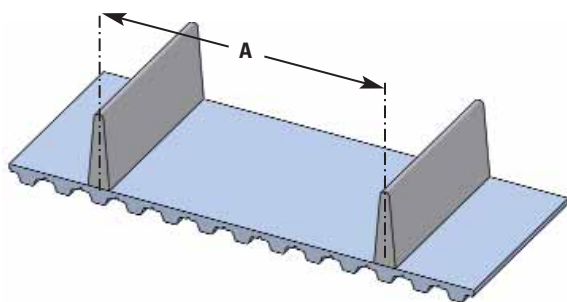

Profile Spacing Tolerance

| Profile Spacing | Over Tooth Non-cumulative | Not Over Tooth |
|--|------------------------------|--------------------|
| 0.2" ≤ A < 1.0" 5 mm ≤ A < 25.4 mm | ±0.015" ±0.38 mm | ±0.020" ±0.5 mm |
| 1.0" ≤ A < 9.0" 25.4 mm ≤ A < 228.6 mm | ±0.020" ±0.5 mm | ±0.025" ±0.6 mm |
| 9.0" ≤ A < 18.0" 228.6 mm ≤ A < 457.2 mm | ±0.025" ±0.6 mm | ±0.030" ±0.8 mm |
| 18.0" ≤ A < 27.0" 457.2 mm ≤ A < 685.8 mm | ±0.030" ±0.8 mm | ±0.035" ±0.9 mm |
| 27.0" ≤ A < 36.0" 685.8 mm ≤ A < 914.4 mm | ±0.035" ±0.9 mm | ±0.040" ±1.0 mm |

For spacing greater than 36.0", add 0.006" per ft.


For spacing greater than 914.4 mm, add 0.15 mm per 305 mm.

Tighter tolerances on profile spacing are available. Contact a Gates Mectrol Applications Engineer for more information.

2. Profile Dimensions

The most important considerations while dimensioning a profile are the size of the base of the profile ("foot" of the profile) and the position of the profile on the belt.

The profile thickness can affect the flexibility of the belt, and can determine the minimum allowable pulley diameter. The flexibility of the belt can be maximized, however, by positioning the profile directly over the tooth of the belt.

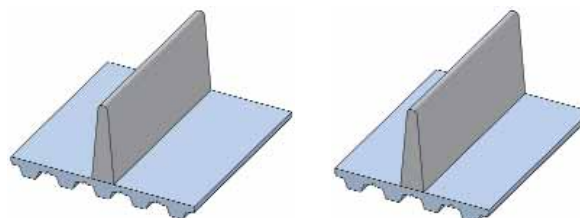

Over Tooth

Not Over Tooth

As the thickness of the foot of the profile increases, the minimum pulley diameter in the system must be increased according to the table on the next page.

The molded tolerances of the profile itself i.e. thickness, height, length, etc. are controlled within ±.010". The installed height tolerance of a profile is typically +.010", -.020".

Gates Mectrol Applications Engineers will assist in all regards where tolerances are an issue. Please contact: apps@gatesmectrol.com.

To access all of our standard profiles visit the Profile Selector Guide at www.gatesmectrol.com.



Profiled Belts – Design Recommendations

Minimum Number of Pulley Teeth For Profiles Over a Tooth*

| Profile "Foot" Thickness | Inch mm | 1/16 1.60 | 1/8 3.00 | 3/16 5.00 | 1/4 6.00 | 5/16 8.00 | 3/8 10.00 | 7/16 11.00 | 1/2 13.00 | 5/8 16.00 | 3/4 19.00 |
|--------------------------|---------|-----------|----------|-----------|----------|-----------|-----------|------------|-----------|-----------|-----------|
| XL | | 10 | 10 | 18 | 25 | 40 | 50 | 60 | 100 | N/R | N/R |
| L | | 12 | 12 | 12 | 18 | 30 | 40 | 50 | 60 | 100 | N/R |
| H, H-HF | | 14 | 14 | 14 | 14 | 18 | 25 | 35 | 45 | 80 | 100 |
| XH | | 18 | 18 | 18 | 18 | 18 | 18 | 18 | 20 | 35 | 50 |
| T5 | | 12 | 12 | 18 | 25 | 40 | 50 | 60 | 100 | N/R | N/R |
| AT5, ATL5 | | 15 | 15 | 18 | 25 | 40 | 50 | 60 | 100 | N/R | N/R |
| T10, T10-HF | | 16 | 16 | 16 | 16 | 18 | 25 | 35 | 45 | 80 | 100 |
| AT10 | | 18 | 18 | 18 | 18 | 22 | 25 | 35 | 45 | 80 | 100 |
| ATL10, ATL10-HF | | 25 | 25 | 25 | 25 | 25 | 25 | 35 | 45 | 80 | 100 |
| T20, AT20 | | 18 | 18 | 18 | 18 | 18 | 18 | 18 | 20 | 35 | 50 |
| ATL20 | | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 30 | 35 | 50 |
| HTD5, STD5 | | 14 | 14 | 16 | 25 | 40 | 50 | 60 | 100 | N/R | N/R |
| HTD8, STD8 | | 20 | 20 | 20 | 24 | 30 | 40 | 50 | 60 | 100 | N/R |
| HTD14 | | 28 | 28 | 28 | 28 | 28 | 28 | 30 | 30 | 50 | 72 |
| HTDL14 | | 43 | 43 | 43 | 43 | 43 | 43 | 43 | 43 | 50 | 72 |

Minimum Number of Pulley Teeth For Profiles Not Over a Tooth*

| Profile "Foot" Thickness | Inch mm | 1/16 1.60 | 1/8 3.00 | 3/16 5.00 | 1/4 6.00 | 5/16 8.00 | 3/8 10.00 | 7/16 11.00 | 1/2 13.00 | 5/8 16.00 | 3/4 19.00 |
|--------------------------|---------|-----------|----------|-----------|----------|-----------|-----------|------------|-----------|-----------|-----------|
| XL | | 12 | 30 | 45 | 50 | 60 | 100 | N/R | N/R | N/R | N/R |
| L | | 12 | 20 | 40 | 45 | 55 | 60 | 70 | 80 | 100 | N/R |
| H, H-HF | | 14 | 14 | 25 | 30 | 45 | 50 | 55 | 65 | 80 | 100 |
| XH | | 18 | 18 | 20 | 30 | 40 | 45 | 50 | 54 | 58 | 60 |
| T5 | | 12 | 30 | 45 | 50 | 60 | 100 | N/R | N/R | N/R | N/R |
| AT5, ATL5 | | 15 | 30 | 45 | 50 | 60 | 100 | N/R | N/R | N/R | N/R |
| T10, T10-HF, AT10 | | 18 | 20 | 30 | 40 | 45 | 50 | 55 | 65 | 80 | 100 |
| ATL10, ATL10-HF | | 25 | 25 | 30 | 40 | 45 | 50 | 55 | 65 | 80 | 100 |
| T20, AT20 | | 18 | 18 | 20 | 30 | 40 | 45 | 50 | 54 | 58 | 60 |
| ATL20 | | 30 | 30 | 30 | 30 | 40 | 45 | 50 | 54 | 58 | 60 |
| HTD5, STD5 | | 18 | 30 | 45 | 50 | 60 | 100 | N/R | N/R | N/R | N/R |
| HTD8, STD8 | | 20 | 20 | 40 | 45 | 55 | 60 | 70 | 80 | 100 | N/R |
| HTD14 | | 28 | 28 | 30 | 42 | 58 | 64 | 72 | 78 | 82 | 86 |
| HTDL14 | | 43 | 43 | 43 | 43 | 58 | 64 | 72 | 78 | 82 | 86 |

*Minimum number of pulley teeth must be equal to or greater than minimum shown in the appropriate Belt Specifications Table.


N/R = not recommended

3. Profile Strength

The strength, and therefore capacity of the profile, depends primarily on the size of the welded profile foot.

The strength of the profile is affected by the type and direction of the force applied to it. Under high loads, the failure mode will normally be either bending and distortion of the profile and belt, or in some cases, the polyurethane may actually tear.


With a load introduced against the profile at a point 1/4" above the belt surface, the strength of the profile is 2,500 lbs. per square inch of welded foot area, or 1724 N/cm².



Profiled Belts – Design Recommendations

4. Wide Base Profiles, and Profiles With Relief

For profiles requiring a wide base, such as pushers, one foot should be left unwelded. This allows for flexing around the pulley yet it remains rigid when loaded.

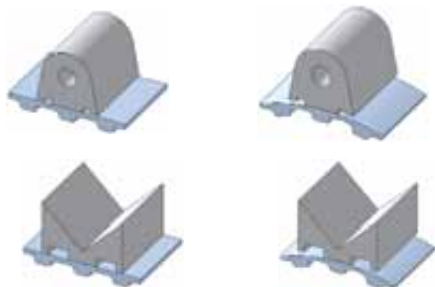

5. Segmented Profiles

When large profiles are required as carriers, they must be either segmented or slotted. This is necessary to allow flexing around the pulley. On the flat conveyor surface, the profiles remain intact.




6. Profiles With Holes

Profiles with holes for securing paddles or other attachments can be produced. Holes are either drilled before bonding, or are molded into the profile depending upon the volume and requirements of the application.

Tolerances of the hole placement depends upon whether the holes are drilled or molded. The tolerance of the hole from the belt surface is subject to the bonding process of the profile foot and the belt surface.


Generally, tolerances are as shown below. However, tighter tolerances are possible. Please consult our Applications Engineering Department.

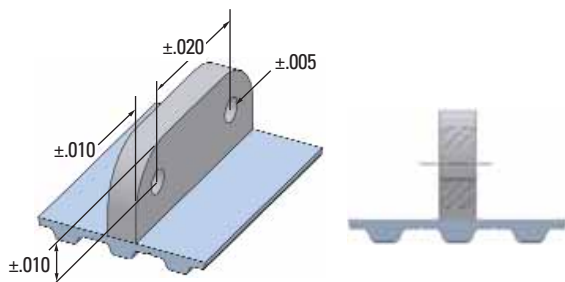

7. Profiles With Inserts

Profiles can be molded with metallic inserts. These are particularly useful in some applications to replace attachment chain.


The actual inserts can either be manufactured by Gates Mectrol or provided by the customer.



8. Flash Bead


During the welding process, a bead of urethane develops at the meeting point of the profile and belt.

The welding bead is removed, “de-flashed”, as necessary.



9. Perpendicularity

All profiles are perpendicular to 1°.



10. Ordering







When ordering a profiled belt, it is advisable to submit a drawing of the profiled belt.

Once a design is finalized, Gates Mectrol will submit a drawing to the customer for approval. This custom belt drawing number should then be used for future ordering.



Profiled Belts – QuickShip Program

Gates Mectrol offers a QuickShip Program based on its most popular profiles. Under this program, orders of ten belts or less, with any of the below profiles, will ship in seven working days!
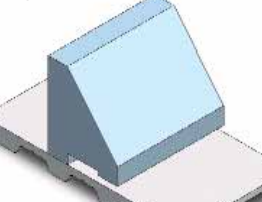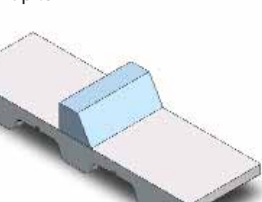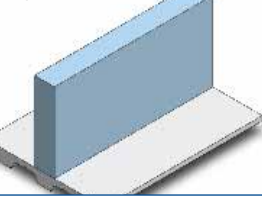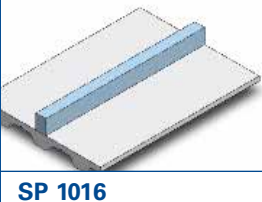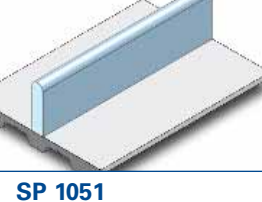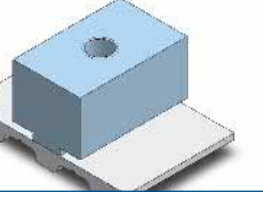
| | | | |
|---|--|--|---|
| <p>AN 1004 1.000[25.4] H x .375[9.5] W up to 12" L</p>  | <p>AN 1008 .850[21.6] H x .690[17.5] W up to 12" L</p>  | <p>AN 1012 .625[15.9] H x .250[6.4] W up to 12" L</p>  | <p>AN 1014 .157[4.0] H x .208[5.3] W up to 12" L</p>  |
| <p>AN 1018 .375[9.5] H x .130[3.3] W up to 12" L</p>  | <p>AN 1027 .290[7.4] H x .240[6.1] W up to 13" L</p>  | <p>AN 1034 .281[7.1] H x .591[15.0] W up to 12" L</p>  | <p>RC 1001 .500[12.7] H x .250[6.4] W up to 12" L</p>  |
| <p>RC 1004 .750[19.1] H x .250[6.4] W up to 12" L</p>  | <p>RC 1007 .250[6.4] H x .250[6.4] W up to 12" L</p>  | <p>RC 1009 1.000[25.4] H x .250[6.4] W up to 12" L</p>  | <p>RC 1042 .125[3.2] H x .250[6.4] W up to 12" L</p>  |
| <p>RC 1043 .188[4.8] H x .125[3.2] W up to 12" L</p>  | <p>RT 1007 .500[12.7] H x .125[3.2] W up to 12" L</p>  | <p>SP 1011 .353[9.0] H x .314[8.0] W up to 12" L</p>  | <p>SP 1013 .728[18.5] H x .788[20.0] W up to 2.5" L</p>  |
| <p>SP 1016 .492[12.50] H x .472[12.0] W up to 6.5" L</p>  | <p>SP 1051 .787[20] H x .236[6] W up to 1.969" L</p>  | <p>SP 1056 .563[14.3] H x .626[15.90] W up to 1" L</p>  | <p>SP 1089 .394[10.0] H x .591[15.01] W up to 1.969" L</p>  |

>> For more information about the QuickShip Program visit www.gatesmectrol.com or call **1-800-394-4844**

Backings

Most belt types can be modified by adding a backing to achieve a desired coefficient of friction, abrasion resistance or cushion. A backing can also be added and then milled to create pockets for product transfer. Gates Mectrol offers over 20 backings to meet your needs.

Application Characteristics

- High friction for feeding or separating applications
- Low friction for light feed or accumulation requirements
- Ability to conform to unusual product shapes
- Combine friction with vacuum for ultimate grab


Features

A customized backing can provide:

- A dramatic increase or decrease in the coefficient of friction
- Varying levels of cushioning and durability through material thickness and hardness selection
- Static conductivity
- Various levels of chemical resistance
- An ability to alter wear characteristics



Its combined characteristics of high friction and abrasion resistance make the seamless Thermoplastic Rubber backing ideal for box folding applications.

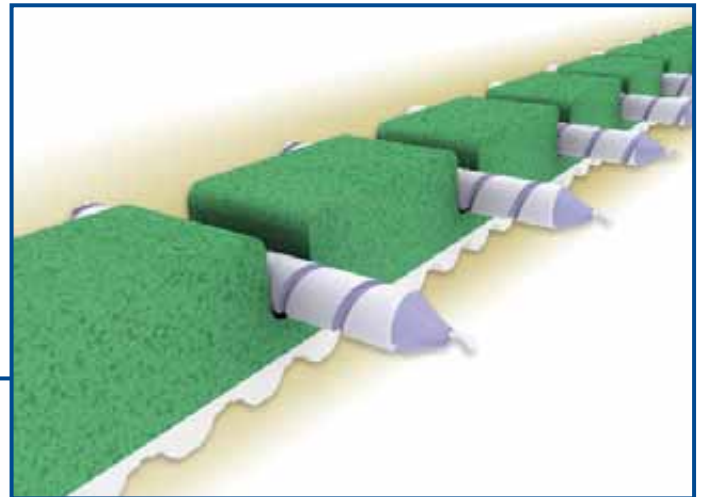

A unique foam backing is used to carefully grasp and transport candles for cooling.



Backings


Perform a wide variety of functions

Many applications require belts with specific surface characteristics. A wide variety of co-extruded as well as post-laminated backings are available to solve your toughest application requirements. Specifications follow.

- Special nylon fabric can be added to the belt back or tooth side during the manufacturing process. This reduces the coefficient of friction for sliding surfaces or product accumulation
- High friction surfaces
- A variety of materials can be added for vibration dampening
- An antistatic surface is available with a resistivity of less than 10^6 Ohms/Square

Polyurethane

Gates Mectrol urethane backings are available in several different varieties. Available in different durometers, with different coefficients of friction, urethane backings are the toughest and most durable backing material.



Clear Urethane



Glass Backing



Ridge Top



White Urethane

Rubber

Feeding applications generally require extremely high friction. Rubber can provide this high friction, even while wet. Some rubber backings also offer antistatic properties, higher temperature ratings, and good chemical and abrasion resistance.



Linatex®



Linaplus FG™



Linatrile®



Tan Natural Rubber




Thermoplastic Rubber

Backings

Foam

Many applications require a combination of friction and the ability to conform to unusual product shapes. Gates Mectrol foam backings are available in different densities for various compliance, cushioning and friction surfaces. Belts can be constructed with a foam layer for cushioning and a tougher high friction outer layer.



HD Yellow



Yellow



Blue



Green



Brown



Red



Neoprene



Natural

PVC

Available with unusual surface patterns and characteristics, PVC backings offer a well bonded, economical solution with very good wear properties.



Rough Top



Small Pebble



Large Pebble



Herringbone



Blue PVC



White PVC

Specialty Backings



Antistatic Coating

Backings – Specifications

Polyurethane

| | | |
|---------------|------------|--|
| 92A Urethane | U1* | Same as standard 92 A hardness base material. Very tough and durable. |
| 85A Urethane | U2* | Softer PU than base material. Higher friction, more flexibility, similar durability. |
| HV1 Urethane | U41 | Specifically compounded for very high coefficient of friction. |
| 75A Urethane | U3* | Softer version of standard urethane. Better friction, more compression, greater flexibility, very tough. |
| Glass Backing | G32 | Longitudinal groove pattern for glass conveying. Good friction and gaps for holding back abrasives and dirt. |
| Ridge Top | G21 | Durable backing with longitudinal ridges. Ideal for conveying oily steel. |
| 75A Urethane | U5* | Softer, high friction with very good abrasion resistance. |

Rubber

| | | |
|----------------------|-------------|--|
| Linatex | L** | High friction, pure gum rubber. Good abrasion resistance, excellent for pulling and feeding applications. |
| Linaplus FG | LP** | FDA approved, high friction pure gum rubber. |
| Linatrilite | LR* | Nitrile rubber combines good abrasion resistance with oil resistance and high service temperature (230° F/100° C). |
| Tan Natural Rubber | LT** | Natural pure gum rubber, high friction. |
| Thermoplastic Rubber | RM* | High friction, ideal for conveying applications. Good oil, ozone and abrasion resistance. |

Foam

| | | |
|-----------------------------|-------------|---|
| High Density PU Yellow Foam | FUY* | High friction. Very good abrasion resistance, excellent for paper feed applications. |
| Yellow PU Foam | FY* | Lower density. Excellent cushioning and conforming to products while providing good friction. |
| Blue PU Foam | FB* | Low density. Excellent cushioning and conforming to products while providing good friction. |
| Green PU Foam | FG* | Mid range density, firmer holding and cushioning, excellent friction. |
| Brown PU Foam | FN* | Mid range density, firmer holding and cushioning, excellent friction. |
| Red PU Foam | FR* | Upper range density, firm holding and cushioning, good friction and abrasion resistance. |
| Neoprene Foam | LF** | Black neoprene good abrasion resistance and compliance. |
| Natural PU Foam | FC* | Mid range density. Less demanding applications. |

PVC

| | | |
|------------------|------------|---|
| Rough Top | RT | Intricate surface modeling, excellent friction surfaces. Great for glass and incline conveyors. |
| Small Pebble Top | SPT | Textured surface with small nubs for non-slip surface. |
| Large Pebble Top | LPT | Textured surface with larger nubs for non-slip surface. |
| Herringbone | PH | Raised herringbone pattern for non-slip and dispersing surface. |
| Blue PVC | PB | Smooth high sheen, high friction surface. |
| White PVC | PW | Smooth white, FDA high friction surface for non-abrasive applications. |

Special

| | | |
|--------------------|------------|--|
| Antistatic Coating | ATB | Extremely good conductivity characteristics for electronic conveying applications. |
|--------------------|------------|--|

Maximum width available for all backings is 6".

Backings – Specifications

| | Hardness Shore A / Density Kg/m ³ | Material Thickness mm | Abrasion Resistance Rating ‡ | Static Coefficient of Friction † | Kinetic Coefficient of Friction † | Max. Temp. Degrees C | Pulley Diameter Factor | Oil Resistance | Color |
|---------------------|--|-----------------------------|------------------------------------|--|---|-------------------------|------------------------------|-------------------|-------|
| Polyurethane | | | | | | | | | |
| U1* | 92 | 2 or 3 | 10 | 0.5 | 0.5 | 80 | 30 | E | Clear |
| U2* | 85 | 2 or 3 | 9 | 0.6 | 0.5 | 80 | 30 | E | Clear |
| U41 | 80 | 1 | 8.5 | 1.0 | 0.8 | 80 | 30 | E | Clear |
| U3* | 75 | 2 or 3 | 8 | 0.6 | 0.6 | 70 | 30 | E | Clear |
| G32 | 75 | 5 | 8 | 0.6 | 0.6 | 70 | Ø100mm | E | Clear |
| G21 | 85 | 3 | 9 | 0.6 | 0.5 | 80 | Ø100mm | E | Clear |
| U5* | 75 | 2 or 3 | 8 | 0.6 | 0.6 | 70 | 25 | E | White |

Rubber

| | | | | | | | | | |
|-------------|----|----------------|-----|-----|-----|-----|----|---|--------|
| L** | 35 | 1/16" to 1/2" | 6 | 1.6 | 1.6 | 60 | 20 | P | Red |
| LP** | 38 | 1/16" to 3/16" | 6 | 1.4 | 1.4 | 60 | 20 | P | White |
| LR* | 55 | 3 to 5 | 6.5 | 1.1 | 1.0 | 110 | 25 | E | Orange |
| LT** | 40 | 1/16" to 1/4" | 6 | 1.5 | 1.5 | 60 | 20 | P | Tan |
| RM* | 57 | 2, 3, 6 | 7 | 2.1 | 1.4 | 105 | 25 | G | Red |

Foam

| | | | | | | | | | |
|-------------|----------|--------------|-----|-----|-----|----|----|---|---------|
| FUY* | 50 | 2 to 5 | 5.5 | 0.8 | 0.8 | 60 | 30 | E | Yellow |
| FY* | - / 160 | 6 to 12 | 3 | 1.0 | 1.0 | 60 | 15 | E | Yellow |
| FB* | - / 220 | 6 to 12 | 3.5 | 0.8 | 0.8 | 60 | 15 | E | Blue |
| FG* | 20 / 300 | 6 to 12 | 4 | 1.0 | 1.0 | 60 | 15 | E | Green |
| FN* | 30 / 400 | 6 to 12 | 4 | 0.8 | 0.8 | 60 | 15 | E | Brown |
| FR* | 40 / 500 | 6 to 12 | 4.5 | 0.9 | 0.9 | 60 | 20 | E | Red |
| LF** | - / 250 | 1/8" to 1/2" | 3 | 0.9 | 0.9 | 60 | 15 | P | Black |
| FC* | 30 / 400 | 2 to 5 | 4 | 0.6 | 0.5 | 60 | 15 | E | Natural |

PVC

| | | | | | | | | | |
|------------|----|--------|-----|-----|-----|----|--------|---|------------|
| RT | 40 | 4.5 | 5.5 | 1.4 | 1.3 | 60 | Ø 90mm | P | Blue-green |
| SPT | 50 | 1.5 | 5.5 | 0.7 | 0.6 | 60 | Ø 25mm | P | White |
| LPT | 35 | 6 | 5.5 | 0.8 | 0.7 | 60 | Ø 40mm | P | White |
| PH | 40 | 4.5 | 5.5 | 0.6 | 0.3 | 60 | Ø 90mm | P | White |
| PB | 40 | 1 or 2 | 5 | 1.1 | 1.1 | 60 | Ø 40mm | P | Blue-green |
| PW | 75 | 2 | 5 | 1.1 | 1.1 | 60 | Ø 40mm | P | White |

Special

| | | | | | | | | | |
|------------|----|-----|-----|-----|-----|----|-----|---|-------|
| ATB | 92 | N/A | 7.5 | 0.3 | 0.3 | 80 | N/A | E | Black |
|------------|----|-----|-----|-----|-----|----|-----|---|-------|

* Add thickness in mm to designator

** Add thickness in 1/16" to designator

‡ 10 = very high resistance

† Friction measured against aluminum

Oil resistance: E = Excellent G = Good P = Poor

Minimum Pulley Diameter = (Pulley Diameter Factor) x (Material Thickness)
or above listed diameter

Note: Pulley diameter must be greater than or equal to the minimum pulley
required for a given belt type. See belt specifications.

Fabrication Capabilities

Gates Mectrol offers a wide range of belt modifications and a full range of secondary fabrication possibilities.


Whether grinding edges and surfaces to tight tolerances, punching and machining holes and slots, or CNC machining of three dimensional contours, Gates Mectrol can provide a complete solution.

Features


- Nearly unlimited customizing options
- Ground tolerances on nearly any dimension for extra precision
- Unusual shapes, contours and configurations
- Holes, slots, and any CNC machined shape in the belt surface
- Combination of primary tooling and secondary machining to achieve any design potential

Application Characteristics

- Vacuum conveying belts
- Machined tooth side and perforations
- Precision machined belts for precise movement of product
- Distinct product orientation and location for automated process steps

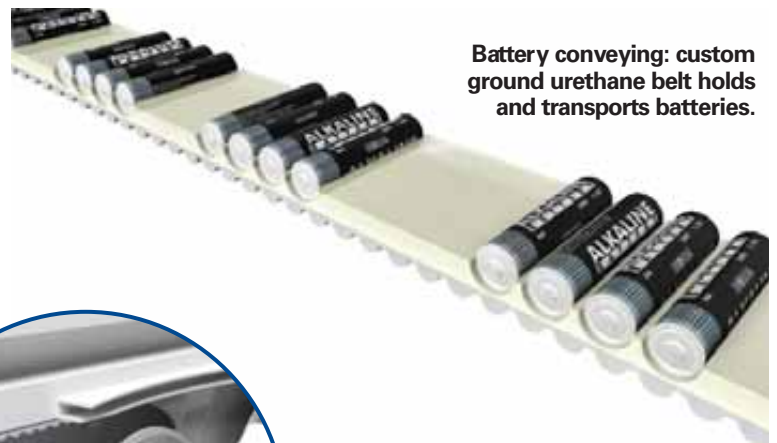

Battery conveying: custom ground urethane belt holds and transports batteries.

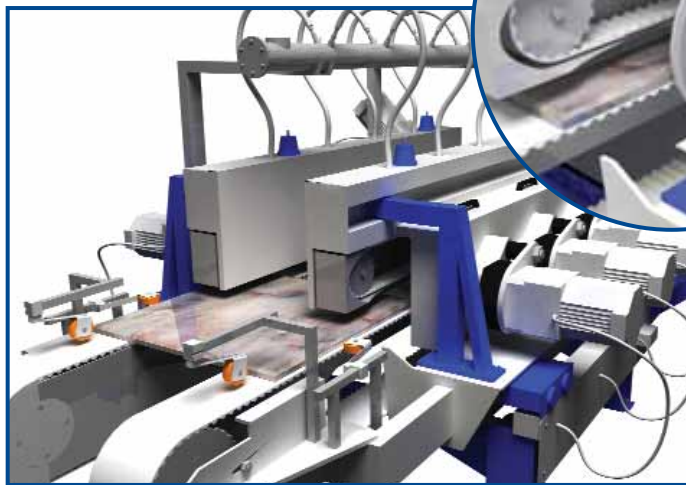

Tile squaring machine utilizes custom belts with precision ground thickness and width.

>> Our Applications Engineering staff is available to you at apps@gatesmectrol.com or **1-800-394-4844**



Truly Endless Belt Overview

Certain power transmission and high performance positioning applications require more strength and stiffness than a welded belt can provide. Gates Mectrol offers two types of truly endless belts to meet these needs.


- **Gates Synchro-Power®** belts are cast on fixed molds and have a continuously wound steel cord. They are available in stock sizes.
- **Flex** belts are extruded to custom lengths ranging from 1.5 to 23.5 meters. A unique process provides the flexibility to have custom sized belts without expensive tooling.

Application Characteristics

- Power transmission
- High power, high performance conveying
- Harsh environments
 - Abrasion and chemical resistance
- Applications where cleanliness is critical

Features

- Helically wound cords for high strength, truly endless power transmission capabilities
- High quality, thermoset polyurethane designed specifically for timing belt applications (Gates Synchro-Power) or thermoplastic urethane for longer length belts (Flex)
- Standard molded sleeves (Gates Synchro-Power) or custom length belts available - up to 23.5 meters (Flex)
- Nylon tooth surface option available on Flex belts for quieter operation

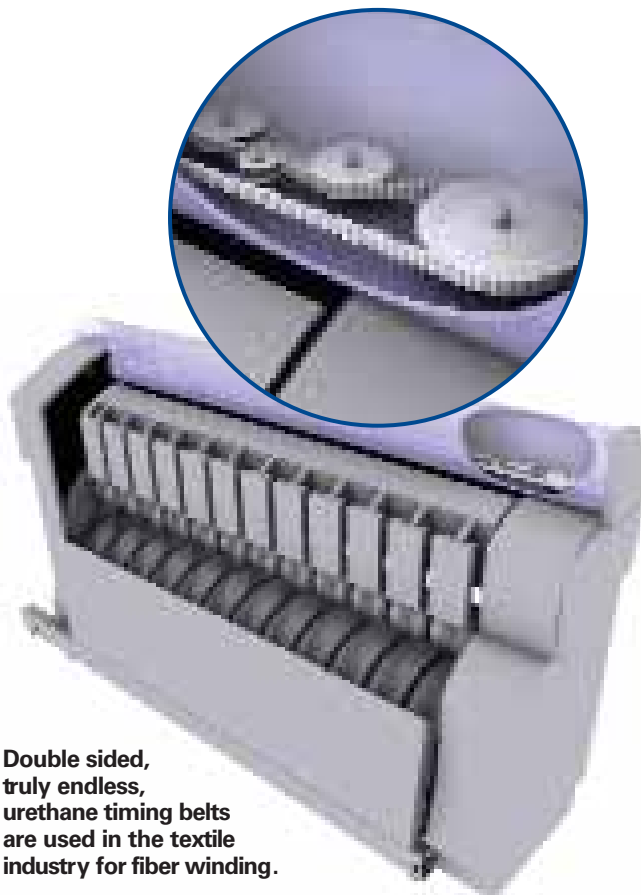

Double sided, truly endless, urethane timing belts are used in the textile industry for fiber winding.

>> Our Applications Engineering staff is available to you at apps@gatesmectrol.com or **1-800-394-4844**

Gates Synchro-Power (Cast) Belts

Gates Synchro-Power belts, **cast belts**, are produced on dedicated tooling and are available from stock in the sizes listed. For belt lengths not listed, please consult a Gates Mectrol applications engineer.



Available Widths

| Pitch | Min. | Max. | Max. Width Exceptions |
|-------|-------|--------|--|
| XL | .250" | 11.81" | |
| L | .375" | 11.81" | |
| H | .375" | 11.81" | |
| T2.5 | 4 mm | 300 mm | 240 mm max width for belt lengths 120 mm, 145 mm |
| T5 | 6 mm | 300 mm | 240 mm max width for belt lengths 150 mm, 165 mm |
| DT5 | 6 mm | 300 mm | |
| T10 | 10 mm | 300 mm | |
| DT10 | 10 mm | 300 mm | |
| AT5 | 6 mm | 300 mm | |
| AT10 | 16 mm | 300 mm | |

Belt Length, inches

| No. of Teeth | XL | L | H |
|--------------|-------|-------|-------|
| Pitch | .200" | .375" | .500" |
| 40 | | 15 | |
| 48 | | | 24 |
| 50 | | 18.75 | |
| 54 | | 20.25 | 27 |
| 55 | 11 | | |
| 56 | | 21 | |
| 60 | 12 | 22.5 | 30 |
| 64 | | 24 | |
| 65 | 13 | | |
| 66 | | | 33 |
| 67 | 13.4 | | |
| 68 | | 25.5 | |
| 70 | 14 | | |
| 72 | | 27 | 36 |
| 75 | 15 | | |
| 76 | | 28.5 | |
| 78 | | | 39 |
| 80 | 16 | 30 | |
| 84 | | | 42 |
| 85 | 17 | | |
| 86 | | 32.25 | |
| 90 | 18 | | 45 |
| 92 | | 34.5 | |
| 95 | 19 | | |
| 96 | | | 48 |
| 97 | 19.4 | | |
| 98 | | 36.75 | |
| 100 | 20 | | |
| 102 | | | 51 |
| 104 | | 39 | |
| 105 | 21 | | |
| 110 | 22 | | |
| 112 | | 42 | |
| 115 | 23 | | |
| 120 | 24 | 45 | |
| 125 | 25 | | |
| 130 | 26 | | |


Truly Endless Belts

Gates Synchro-Power (Cast) Belts

Truly Endless Belts

| Belt Length (mm) | | | | Belt Length (mm) | | | | Belt Length (mm) | | | |
|------------------|-------|-----|-----|------------------|-------|-----|-----|------------------|------|------|-----|
| No. of Teeth | T2.5 | T5 | DT5 | No. of Teeth | T2.5 | T5 | DT5 | No. of Teeth | T2.5 | T5 | DT5 |
| 30 | | 150 | | 89 | | 445 | | 140 | | 700 | |
| 33 | | 165 | | 90 | | 450 | | 144 | | 720 | |
| 36 | | 180 | | 91 | | 455 | | 145 | | 725 | |
| 37 | | 185 | | 92 | 230 | | 460 | 150 | | 750 | 750 |
| 40 | | 200 | | 95 | | 475 | | 152 | 380 | | |
| 43 | | 215 | | 96 | | 480 | | 156 | | 780 | |
| 44 | | 220 | | 98 | 245 | | | 160 | | 800 | |
| 45 | | 225 | | 100 | | 500 | | 163 | | 815 | 815 |
| 48 | 120 | | | 102 | | 510 | | 168 | 420 | 840 | |
| 49 | | 245 | | 103 | | | 515 | 170 | | 850 | |
| 50 | | 250 | | 105 | | 525 | | 172 | | | 860 |
| 51 | | 255 | | 106 | 265 | | | 180 | | 900 | |
| 52 | | 260 | | 109 | | 545 | | 188 | | 940 | 940 |
| 54 | | 270 | | 110 | | 550 | | 192 | 480 | | |
| 55 | | 275 | | 112 | | 560 | | 198 | | 990 | |
| 56 | | 280 | | 114 | 285 | | | 200 | 500 | | |
| 59 | 145 | 295 | | 115 | | 575 | | 215 | | 1075 | |
| 61 | | 305 | | 116 | 290 | | | 216 | 540 | | |
| 64 | 160 | | | 118 | | 590 | 590 | 220 | | 1100 | |
| 66 | | 330 | | 120 | | 600 | | 240 | 600 | | |
| 68 | | 340 | | 122 | 305 | 610 | | 243 | | 1215 | |
| 70 | | 350 | | 124 | | 620 | 620 | 248 | 620 | | |
| 71 | 177.5 | 355 | | 126 | | 630 | | 260 | 650 | | |
| 72 | 180 | | | 127 | 317.5 | | | 263 | | 1315 | |
| 73 | 182.5 | 365 | | 128 | | 640 | | 276 | | 1380 | |
| 78 | | 390 | | 130 | | 650 | | 280 | 700 | | |
| 80 | 200 | 400 | | 132 | 330 | 660 | | 312 | 780 | | |
| 82 | | 410 | 410 | 135 | | 675 | | 366 | 915 | | |
| 84 | | 420 | | 138 | | 690 | | 380 | 950 | | |

To Order Gates Synchro-Power Belts

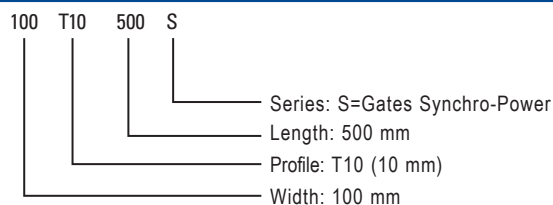

Gates Synchro-Power (Cast) Belts

| No. of Teeth | Belt Length (mm) | |
|--------------|------------------|------|
| | T10 | DT10 |
| 26 | 260 | 260 |
| 37 | 370 | |
| 40 | 400 | |
| 41 | 410 | |
| 44 | 440 | |
| 45 | 450 | |
| 50 | 500 | |
| 53 | 530 | 530 |
| 56 | 560 | |
| 60 | 600 | |
| 61 | 610 | |
| 63 | 630 | 630 |
| 66 | 660 | 660 |
| 69 | 690 | |
| 70 | 700 | |
| 72 | 720 | 720 |
| 73 | 730 | |
| 75 | 750 | |
| 78 | 780 | |
| 80 | 800 | |
| 81 | 810 | |
| 84 | 840 | 840 |
| 85 | 850 | |
| 88 | 880 | |
| 89 | 890 | |
| 90 | 900 | |
| 91 | 910 | |
| 92 | 920 | 920 |
| 95 | 950 | |
| 96 | 960 | |
| 97 | 970 | |


| No. of Teeth | Belt Length (mm) | |
|--------------|------------------|------|
| | T10 | DT10 |
| 98 | 980 | 980 |
| 100 | 1000 | |
| 101 | 1010 | |
| 108 | 1080 | |
| 110 | 1100 | |
| 111 | 1110 | |
| 114 | 1140 | |
| 115 | 1150 | |
| 121 | 1210 | 1210 |
| 124 | 1240 | 1240 |
| 125 | 1250 | 1250 |
| 130 | 1300 | |
| 132 | 1320 | 1320 |
| 135 | 1350 | 1350 |
| 139 | 1390 | |
| 140 | 1400 | |
| 142 | 1420 | 1420 |
| 144 | 1440 | |
| 145 | 1450 | |
| 146 | 1460 | |
| 150 | 1500 | |
| 156 | 1560 | |
| 160 | 1600 | |
| 161 | 1610 | 1610 |
| 170 | 1700 | |
| 175 | 1750 | |
| 178 | 1780 | |
| 188 | 1880 | 1880 |
| 196 | 1960 | |
| 225 | 2250 | |

| No. of Teeth | Belt Length (mm) | |
|--------------|------------------|------|
| | AT5 | AT10 |
| 45 | 225 | |
| 50 | | 500 |
| 51 | 255 | |
| 55 | 275 | |
| 56 | 280 | 560 |
| 60 | 300 | |
| 61 | | 610 |
| 66 | | 660 |
| 68 | 340 | |
| 70 | | 700 |
| 73 | | 730 |
| 75 | 375 | |
| 78 | 390 | 780 |
| 80 | | 800 |
| 81 | | 810 |
| 84 | 420 | 840 |
| 89 | | 890 |
| 91 | 455 | |
| 92 | | 920 |
| 96 | | 960 |
| 98 | | 980 |
| 100 | 500 | |
| 101 | | 1010 |
| 105 | | 1050 |
| 108 | | 1080 |
| 109 | 545 | |
| 115 | | 1150 |
| 120 | 600 | 1200 |
| 121 | | 1210 |
| 122 | 610 | |
| 125 | | 1250 |
| 126 | 630 | |
| 132 | 660 | 1320 |
| 140 | | 1400 |
| 144 | 720 | |
| 150 | 750 | 1500 |
| 156 | 780 | |
| 160 | | 1600 |
| 165 | 825 | |
| 170 | | 1700 |
| 180 | | 1800 |
| 195 | 975 | |
| 210 | 1050 | |
| 225 | 1125 | |
| 300 | 1500 | |

Truly Endless Belts

Gates Synchro-Power (Cast) Belts

Gates Synchro-Power belts are available with steel reinforcing cords.

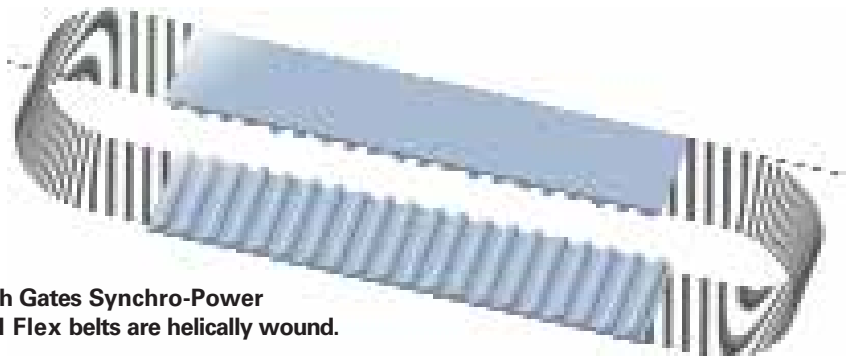

Both Gates Synchro-Power and Flex belts are helically wound.

Gates Synchro-Power Specifications

| | | XL | L | H | T2.5 | T5 | T5 DL | AT5 | T10 | T10 DL | AT10 |
|--|-----------|--------------------------------------|--------------|--------------|--------------|------------|------------|------------|-------------|-------------|-------------|
| Pitch | | .200" | .375" | .500" | 2.5mm | 5mm | 5mm | 5mm | 10mm | 10mm | 10mm |
| Ultimate Tensile Strength per Inch or 25mm Belt Width | lbf/in | 920 | 1925 | 2203 | 600 | 920 | 920 | 1884 | 2157 | 2157 | 3216 |
| | N/25mm | 4092 | 8562 | 9798 | 2670 | 4092 | 4092 | 8380 | 9594 | 9594 | 14305 |
| Max. Allowable Belt Tension per Inch or 25mm Belt Width | lbf/in | 232 | 473 | 697 | 91 | 232 | 232 | 448 | 558 | 558 | 1017 |
| | N/25mm | 1032 | 2104 | 3101 | 404 | 1032 | 1032 | 1992 | 2482 | 2482 | 4523 |
| Allowable Effective Tension for the Belt Teeth (15 and More Teeth in Mesh) | lbf/in | 180 | 360 | 441 | 61 | 200 | 200 | 290 | 380 | 380 | 580 |
| | N/25mm | 800 | 1600 | 1960 | 270 | 890 | 890 | 1290 | 1690 | 1690 | 2580 |
| Specific Belt Weight | lbf/ft/in | 0.036 | 0.059 | 0.071 | 0.024 | 0.035 | 0.044 | 0.058 | 0.075 | 0.101 | 0.111 |
| | kgf/m/cm | 0.021 | 0.035 | 0.042 | 0.014 | 0.0206 | 0.026 | 0.034 | 0.044 | 0.059 | 0.065 |
| Specific Belt Stiffness | lbf/in | 58004 | 118263 | 174338 | 23075 | 58932 | 58932 | 113782 | 141761 | 141761 | 258298 |
| | N/mm | 10157 | 20709 | 30529 | 4040 | 10320 | 10320 | 19925 | 24825 | 24825 | 45233 |
| Min. No. of Pulley Teeth | | 10 | 10 | 14 | 12 | 10 | 10 | 15 | 14 | 14 | 15 |
| Min. Pitch Diameter | mm | .64" | 1.19" | 2.23" | 10 | 16 | 16 | 24 | 45 | 45 | 48 |
| Min. Diameter of Tensioning Idler Running on Back of Belt | in | 1.125 | 2.375 | 3.125 | 0.787 | 1.125 | 0.625 | 2.375 | 3.125 | 1.875 | 4.75 |
| | mm | 30 | 60 | 80 | 20 | 30 | 16 | 60 | 80 | 45 | 120 |
| Service Temperature Range | | -5 ° C to 70 ° C (23 ° F to 158 ° F) | | | | | | | | | |
| Hardness | | 88 Shore A | | | | | | | | | |
| Standard Color | | Natural | | | | | | | | | |

Width Tolerances

| | | | | | | | | | | | |
|------------|----|-------|-------|-------|------|------|------|------|------|------|-------|
| Slit Belts | mm | ±.02" | ±.03" | ±.03" | ±0.3 | ±0.5 | ±0.5 | ±0.5 | ±0.5 | ±0.5 | ±0.75 |
|------------|----|-------|-------|-------|------|------|------|------|------|------|-------|

The specifications listed are based on Gates Mectrol's experience. However, our specifications and data do NOT cover all possible belt drive conditions. It is the responsibility of the belt drive system designer to ensure Gates Mectrol's belts are appropriate for a given system and application. The provided data is representative of our in-house experience and does not necessarily match product performance in industrial use. Gates Mectrol cannot assume any liability concerning the suitability and process ability of our products. We also cannot assume liability for process results, damages or consequential damages associated with the use of our products. Note, ultimate tensile strengths are listed for references purposes only. Ultimate tensile strength values are a theoretical calculation based on average cord strength and may not represent actual tensile test results.

Flex Belts

Flex belts are produced with steel reinforcing cords and the same tough urethane as Gates Mectrol's standard linear belts.

| | XL | L | H | XH | T5 | AT5 | T10 | AT10 | ATL10 | T20 | AT20 | ATL20 | HTD5 | HTD8 | HTD14 |
|----------------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| Minimum Length without NT* | 59.20" | 59.25" | 59.50" | 59.50" | 1.50 m | 1.50 m | 1.50 m | 1.50 m | 1.50 m | 1.50 m | 1.50 m | 1.50 m | 1.55 m | 1.50 m | 1.55 m |
| Minimum Length with NT* | 75.00" | 75.00" | 75.00" | 75.25" | 1.90 m | 1.90 m | 1.90 m | 1.90 m | 1.90 m | 1.90 m | 1.90 m | 1.90 m | N/A | 1.90 m | N/A |
| Maximum Length | 779.60" | 779.63" | 780.00" | 779.63" | 19.80 m | 19.80 m | 19.80 m | 19.80 m | 19.80 m | 19.80 m | 19.80 m | 19.80 m | 14.90 m | 19.80 m | 23.49 m |
| Minimum Width | .25" | .25" | .50" | 1.0" | 10 mm | 10 mm | 16 mm | 25 mm | 25 mm | 32 mm | 32 mm | 32 mm | 25 mm | 25 mm | 25 mm |
| Maximum Width | 6.0" | 6.0" | 6.0" | 6.0" | 150 mm | 150 mm | 150 mm | 150 mm | 150 mm | 150 mm | 150 mm | 150 mm | 100 mm | 150 mm | 100 mm |

* NT = nylon on tooth side


Flex Width Tolerances

| | | | | | | | | | | | | | | | |
|--------------------------|---------|---------|---------|---------|----------|----------|----------|----------|---------|---------|---------|---------|----------|----------|---------|
| Up to 2" Up to 50 mm | ±0.020" | ±0.020" | ±0.020" | ±0.040" | ±0.5 mm | ±0.5 mm | ±0.5 mm | ±0.75 mm | ±1.0 mm | ±1.0 mm | ±1.0 mm | ±1.5 mm | ±0.5 mm | ±0.75 mm | ±1.0 mm |
| >2" - 6" >50 - 150 mm | ±0.030" | ±0.030" | ±0.030" | ±0.040" | ±0.75 mm | ±0.75 mm | ±0.75 mm | ±1.0 mm | ±1.5 mm | ±1.0 mm | ±1.5 mm | ±1.5 mm | ±0.75 mm | ±1.0 mm | ±1.5 mm |


Flex Specifications

| | XL | L | H | XH | T5 | AT5 | T10 | AT10 | ATL10 | T20 | AT20 | ATL20 | HTD5 | HTD8 | HTD14 | |
|--|----------------------------------|----------------|----------------|-----------------|-----------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Pitch (Imperial and Metric) | .200" | .375" | .500" | .875" | 5 mm | 5 mm | 10 mm | 10 mm | 10 mm | 20 mm | 20 mm | 20 mm | 5 mm | 8 mm | 14 mm | |
| Ultimate Tensile Strength per Inch or 25 mm Belt Width | lbf/in N/25 mm | 759 3375 | 1474 6555 | 1605 7140 | 3204 14250 | 759 3375 | 1602 7125 | 1605 7140 | 3204 14250 | 5445 24220 | 3170 14102 | 5445 24220 | 7306 32500 | 1602 7125 | 3204 14250 | 4667 20760 |
| Max. Allowable Belt Tension per Inch or 25 mm Belt Width | lbf/in N/25 mm | 192 853 | 371 1652 | 429 1909 | 854 3801 | 189 840 | 396 1761 | 429 1909 | 841 3741 | 1317 5860 | 832 3702 | 1317 5860 | 1599 7114 | 396 1761 | 841 3741 | 1159 5156 |
| Allowable Effective Tension for Belt Teeth (15 and More Teeth in Mesh) | lbf/in N/25 mm | 180 800 | 360 1600 | 441 1960 | 879 3910 | 200 890 | 290 1290 | 380 1690 | 580 2580 | 580 2580 | 710 3160 | 1221 5430 | 1221 5430 | 229 1020 | 420 1870 | 771 3430 |
| Specific Weight | lbf/ft/in kgf/m/cm | 0.036 0.021 | 0.059 0.035 | 0.066 0.039 | 0.180 0.105 | 0.037 0.022 | 0.055 0.032 | 0.074 0.043 | 0.096 0.056 | 0.114 0.067 | 0.125 0.073 | 0.169 0.099 | 0.185 0.108 | 0.070 0.041 | 0.101 0.059 | 0.182 0.107 |
| Belt Specific Stiffness | lbf/in N/mm | 47950 8400 | 92800 16255 | 109000 19085 | 213600 37410 | 47950 8400 | 100500 17605 | 109000 19085 | 213600 37410 | 334600 58600 | 213600 37410 | 334600 58600 | 440000 77050 | 100532 17605 | 213600 37410 | 294400 51560 |
| Min. No. of Pulley Teeth | | 10 | 10 | 14 | 18 | 10 | 15 | 14 | 15 | 25 | 15 | 18 | 30 | 14 | 20 | 28 |
| Min. Pitch Diameter (Inch or mm) | | .64" | 1.19" | 2.23" | 5.01" | 16 mm | 24 mm | 45 mm | 48 mm | 80 mm | 96 mm | 115 mm | 191 mm | 22 mm | 51 mm | 125 mm |
| Min. Diameter of Tensioning Idler Running on Back of Belt | in mm | 1.125 30 | 2.375 60 | 3.125 80 | 5.875 150 | 1.125 30 | 2.375 60 | 3.125 80 | 4.750 120 | 5.875 150 | 4.750 120 | 7.125 180 | 9.875 250 | 2.375 60 | 4.750 120 | 7.875 200 |
| Service Temperature Range | -5° C to 70° C (23° F to 158° F) | | | | | | | | | | | | | | | |
| Hardness | 92 Shore A | | | | | | | | | | | | | | | |
| Standard Color | White | | | | | | | | | | | | | | | |

To Order Flex Belts (Imperial Pitch)

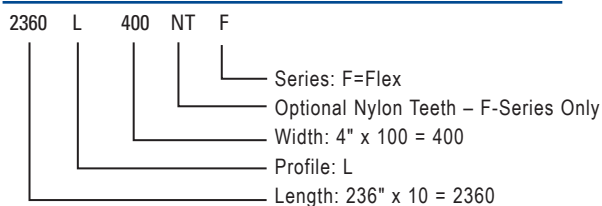

To Order Flex or Gates Synchro-Power Belts (Metric Pitch)

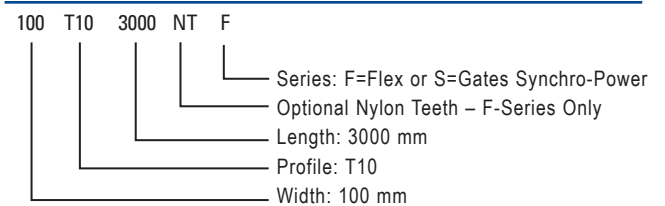

Flat Belt Overview

Gates Mectrol offers a full line of high strength, low stretch flat belts for lifting and positioning applications. These flat belts are typically sold in open ended lengths and are clamped at each end.


Application Characteristics

- Heavy load lifting or lowering
- Allows for “slip” requirement
- Smooth uniform motion
- Small bending radius for small design envelope
- Very low stretch characteristics

Features

- Smooth, vibration free operation
- Use with small pulley diameters
- High strength, low stretch for long life
- Sealed edges, no cord fraying
- Easily guided with flanged pulleys
- Kevlar or steel cord construction
- No lubrication needed
- No retensioning required

Gates Mectrol's Kevlar reinforced urethane flat belts have limited stretch, are oil and cut resistant, making them ideal for harsh environments such as metal stamping conveyors.

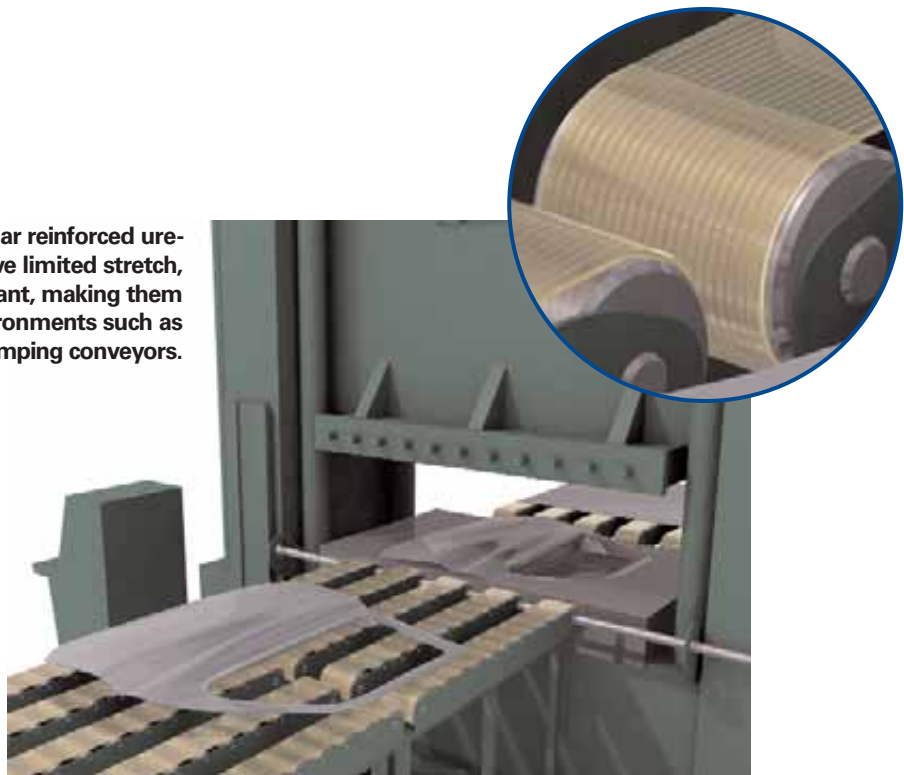

>> Our Applications Engineering staff is available to you at apps@gatesmectrol.com or **1-800-394-4844**

Flat Belt – Design Recommendations

- In contrast to fabric coated flat belts, Gates Mectrol flat belts have very high strength and extremely low stretch. They are designed to be run on flat faced pulleys with flanges. Crowned pulleys should not be used
- Gates Mectrol flat belts are not recommended for applications which involve belt twisting. Should an application require that a belt be twisted 90°, the length over which the twist occurs should be a minimum of 15 inches for a one inch wide belt.
- Gates Mectrol flat belts are not to be used in lat pull down machines or other machines in which belt twist is unrestricted.



| Materials | | 92A PU | 85A PU |
|---------------------------|--------------------------------|-------------------------------------|--------------------------------------|
| Service Temperature Range | | -5° C to 70° C (23° F to 158° F) | -10° C to 60° C (14° F to 140° F) |
| Hardness, Shore A | | 92 | 85 |
| Coefficient of Friction | Belt Material vs. Steel (dry) | 0.5 | 0.7 |
| | Urethane vs. Aluminum (dry) | 0.5 | 0.6 |
| | Belt Material vs. UHMWPE (dry) | 0.2 | 0.4 |
| | Nylon vs. Steel (dry) | 0.2 to 0.4 | 0.2 to 0.4 |
| | Nylon vs. UHMWPE (dry) | 0.1 to 0.3 | 0.1 to 0.3 |



Precision high strength, low stretch flat belts utilize tough urethane construction with specialty high carbon steel cord to lift heavy loads such as elevators.

Flat Belt Specifications

| Application | | | Conveying | | | | | |
|--|------------|-----------|-----------|--------|---------------|--------|--------|---------------|
| | | | F8 | | | F12 | | |
| Nominal Thickness | inch | | 0.08 | | | 0.125 | | |
| | metric | | 2.0 | | | 3.0 | | |
| Cord | | | Steel | Kevlar | Hi-Flex Steel | Steel | Kevlar | Hi-Flex Steel |
| Ultimate Tensile Strength per Inch or 25mm Belt Width | | lbf/in | 1605 | 1818 | 2370 | 1605 | 1818 | 2370 |
| | | N/25 mm | 7140 | 8085 | 10540 | 7140 | 8085 | 10540 |
| Max Allowable Belt Tension per Inch or 25mm Belt Width | Open Ended | lbf/in | 436 | 243 | 658 | 436 | 243 | 658 |
| | | N/25 mm | 1939 | 1080 | 2925 | 1939 | 1080 | 2925 |
| | Welded | lbf/in | 218 | 121 | 329 | 218 | 121 | N/A |
| | | N/25 mm | 969 | 540 | 1463 | 969 | 540 | N/A |
| Specific Belt Weight | | lbf/ft/in | 0.057 | 0.045 | 0.057 | 0.078 | 0.066 | 0.080 |
| | | kgf/m /cm | 0.033 | 0.026 | 0.033 | 0.046 | 0.039 | 0.047 |
| Specific Belt Stiffness (Open Ended) | | lbf/in | 109000 | 60700 | 133620 | 109000 | 60700 | 133620 |
| | | N/mm | 19085 | 10635 | 23400 | 19085 | 10635 | 23400 |
| Min. Pulley Diameter | | in | 1.8 | 1.8 | 1.5 | 2.4 | 2.4 | 2.0 |
| | | mm | 45 | 45 | 38 | 60 | 60 | 50 |
| Min. Dia. of Tensioning Idler Running on Back of Belt | | in | 2.7 | 2.7 | 2.2 | 4.7 | 4.7 | 4.1 |
| | | mm | 68 | 68 | 57 | 120 | 120 | 105 |
| Standard Material | | | PU | PU | PU | PU | PU | PU |
| Standard Colors (BK=Black, N=Natural) | | | N | N | BK | N | N | BK |
| Max. Width | | in | 4 | 4 | 6 | 4 | 4 | 6 |
| | | mm | 100 | 100 | 150 | 100 | 100 | 150 |
| Min. Welded Belt Length | | in | 19 | 19 | 38 | 20 | 20 | 20 |
| | | mm | 483 | 483 | 960 | 508 | 508 | 508 |
| Standard Roll Length | | ft | 200 | 200 | 328 | 200 | 200 | 328 |
| | | m | 61 | 61 | 100 | 61 | 61 | 100 |
| Width Tolerance | up to 2" | | +/- .020" | | | | | |
| | >2" | | +/- .030" | | | | | |


Do not use Gates Mectrol belts, pulleys or sprockets in applications that depend solely upon the belt to raise/lower, support or sustain a mass without an independent safety backup system. The specifications listed are based on Gates Mectrol's experience. However, our specifications and data do NOT cover all possible belt drive conditions. It is the responsibility of the belt drive system designer to ensure Gates Mectrol's belts are appropriate for a given system and application. The provided data is representative of our in-house experience and does not necessarily match product performance in industrial use. Gates Mectrol cannot assume any liability concerning the suitability and process ability of our products. We also cannot assume liability for process results, damages or consequential damages associated with the use of our products. Note, ultimate tensile strengths are listed for references purposes only. Ultimate tensile strength values listed above are a theoretical calculation based on average cord strength and may not represent actual tensile test results.

| Lifting | | | | | |
|---------|---------------|--------|---------------|--------|--------|
| FL8 | | FL12 | | F13 | F19 |
| 0.08 | | 0.12 | | 0.13 | 0.19 |
| 2.0 | | 3.0 | | 3.2 | 4.8 |
| Steel | Hi-Flex Steel | Steel | Hi-Flex Steel | Steel | Steel |
| 3204 | 2917 | 5445 | 6059 | 7554 | 10117 |
| 14250 | 12975 | 24220 | 26950 | 33600 | 45000 |
| 854 | 971 | 1338 | 1427 | 1999 | 3008 |
| 3800 | 4320 | 5953 | 6349 | 8892 | 13378 |
| N/A | N/A | N/A | N/A | N/A | N/A |
| N/A | N/A | N/A | N/A | N/A | N/A |
| 0.073 | 0.060 | 0.113 | 0.113 | 1.137 | 0.183 |
| 0.043 | 0.035 | 0.066 | 0.066 | 0.080 | 0.107 |
| 213600 | 197350 | 334600 | 290030 | 406240 | 611160 |
| 37410 | 34560 | 58600 | 50790 | 71140 | 107025 |
| 1.9 | 1.5 | 3.1 | 2.5 | 6.3 | 5.9 |
| 48 | 38 | 80 | 64 | 160 | 150 |
| 2.8 | 2.2 | 4.7 | 3.8 | 6.3 | 8.9 |
| 72 | 57 | 120 | 96 | 160 | 225 |
| PU | PU | PU | PU | PU | PU |
| N | BK | BK | BK | BK | BK |
| 4 | 6 | 4 | 6 | 6 | 6 |
| 100 | 150 | 100 | 150 | 150 | 150 |
| N/A | N/A | N/A | N/A | N/A | N/A |
| N/A | N/A | N/A | N/A | N/A | N/A |
| 200 | 328 | 200 | 328 | 164 | 164 |
| 61 | 100 | 61 | 100 | 50 | 50 |

+/- .020"

+/- .030"

To Order Flat Belts

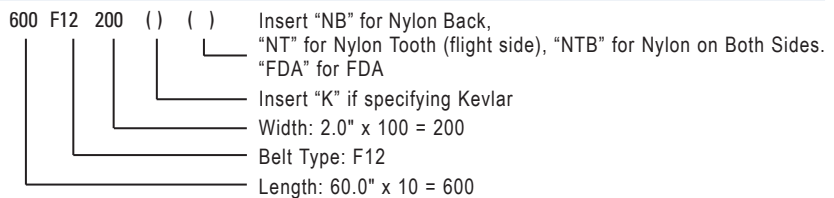

Pulley Overview

Gates Mectrol manufactures a complementary line of timing pulleys. While industry standards do exist for most pulley groove geometries, each manufacturer has its own interpretation of those standards. For the longest belt life and quietest operation, it is recommended that the timing belts and pulleys be single-sourced so that the components are matched. Recognizing that any project may have different pulley style requirements, Gates Mectrol offers a Custom Pulley Program, which allows for additional features as needed.

In addition to pulley alternatives, Gates Mectrol offers a Clamp Plate Program with many items in stock.

Custom Pulley Program

This program is designed to meet your made-to-print custom pulley requirements.

- Unlimited design freedom
- Three raw material choices:
aluminum, steel or stainless steel

Clamp Plates

Gates Mectrol offers an in-stock program for clamp plates.




Custom Pulley Program

Pulleys can be customized to fit specific applications. Below are the options available:


| Material | Flanges | Coatings | Optional Pitches |
|--|--|---|---|
| <ul style="list-style-type: none"> Aluminum Steel Stainless steel | <ul style="list-style-type: none"> Zinc plated steel Stainless steel (for stainless steel pulleys) | <ul style="list-style-type: none"> Clear anodize Black anodize Clear hardcoat Black oxide Electroless nickel | <p>Most pitches can be supplied as zero backlash</p> <ul style="list-style-type: none"> Typically used for precise positioning applications only |

Pulley Types

2F – Two Flanges

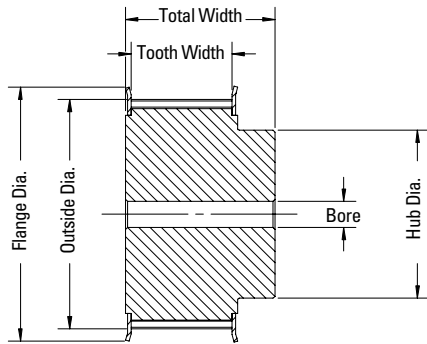


0F – No Flanges

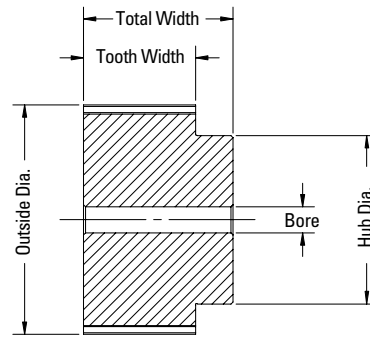


V-Guides

For wider belts, and larger pulleys without flanges, one of the following V-guides is recommended for improved tracking:

For Metric Pitch Belts




K6 Section




K13 Section

For Imperial Pitch Belts





A Section



O Section

Custom Pulley Program

Standard Keyway Dimensions and Tolerances

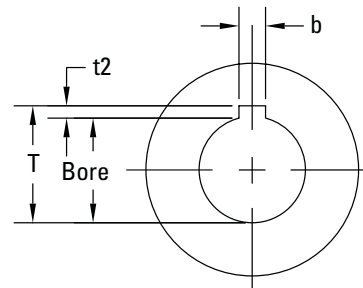

Imperial Shaft Diameter

| Over | Up to and Including | Width wk | Tolerance wk | Depth hk | Tolerance hk |
|-------|---------------------|----------|--------------|----------|--------------|
| | 0.438 | 0.094 | | 0.047 | |
| 0.438 | 0.563 | 0.125 | +0.0030 | 0.063 | |
| 0.563 | 0.875 | 0.188 | -0.0000 | 0.094 | |
| 0.875 | 1.250 | 0.250 | | 0.125 | |
| 1.250 | 1.375 | 0.313 | +0.0035 | 0.156 | +0.015 |
| 1.375 | 1.750 | 0.375 | -0.0000 | 0.188 | -0.000 |
| 1.750 | 2.250 | 0.500 | | 0.250 | |
| 2.250 | 2.750 | 0.625 | | 0.313 | |
| 2.750 | 3.250 | 0.750 | +0.0040 | 0.375 | |
| 3.250 | 3.750 | 0.875 | -0.0000 | 0.438 | |
| 3.750 | 4.500 | 1.000 | | 0.500 | |
| 4.500 | 5.500 | 1.125 | +0.0050 | 0.625 | |
| 5.500 | 6.500 | 1.500 | -0.0000 | 0.750 | |

Metric Shaft Diameter

| Over | Up to and Including | Width b | Tolerance on b | *Depth t2 | Tolerance t2 |
|------|---------------------|---------|----------------|-----------|--------------|
| 6 | 8 | 2 | +0.060 | 1.0 | |
| 8 | 10 | 3 | +0.020 | 1.4 | |
| 10 | 12 | 4 | +0.078 | 1.8 | +0.1 |
| 12 | 17 | 5 | +0.030 | 2.3 | -0 |
| 17 | 22 | 6 | | 2.8 | |
| 22 | 30 | 8 | +0.098 | 3.3 | |
| 30 | 38 | 10 | +0.040 | 3.3 | |
| 38 | 44 | 12 | | 3.3 | |
| 44 | 50 | 14 | +0.120 | 3.8 | |
| 50 | 58 | 16 | +0.050 | 4.3 | |
| 58 | 65 | 18 | | 4.4 | +0.2 |
| 65 | 75 | 20 | | 4.9 | -0 |
| 75 | 85 | 22 | +0.149 | 5.4 | |
| 85 | 95 | 25 | +0.065 | 5.4 | |
| 95 | 110 | 28 | | 6.4 | |
| 110 | 130 | 32 | | 7.4 | |
| 130 | 150 | 36 | +0.180 | 8.4 | +0.3 |
| 150 | 170 | 40 | +0.080 | 9.4 | -0 |

* Metric keyway depths are specified from the bottom of the keyway to a line tangent to the bore at the keyway centerline.
 $T = \text{Bore Diameter} + t_2$

Clamp Plates

Clamp plates are often used in motion control applications where one belt end is anchored by means of a clamp plate. The Gates Mectrol clamp plate engages eight teeth and has an end cutoff designed to prevent cord fatigue.

AT5

| Belt Width mm | In Stock | Length mm | B mm | Width mm | Hole Dia. mm | E mm | F mm | M mm | Thickness mm | Part Number |
|------------------|-------------|--------------|---------|-------------|-----------------|---------|---------|---------|-----------------|-------------|
| 6 | | 43 | 4 | 27.5 | 5.5 | 12.5 | 7.5 | 9 | 8 | CGPAT56 |
| 10 | | 43 | 4 | 31.5 | 5.5 | 16.5 | 7.5 | 9 | 8 | CGPAT510 |
| 12 | | 43 | 4 | 33.5 | 5.5 | 18.5 | 7.5 | 9 | 8 | CGPAT512 |
| 16 | | 43 | 4 | 37.5 | 5.5 | 22.5 | 7.5 | 9 | 8 | CGPAT516 |
| 20 | | 43 | 4 | 41.5 | 5.5 | 26.5 | 7.5 | 9 | 8 | CGPAT520 |
| 25 | • | 43 | 4 | 46.5 | 5.5 | 31.5 | 7.5 | 9 | 8 | CGPAT525 |
| 32 | • | 43 | 4 | 53.5 | 5.5 | 38.5 | 7.5 | 9 | 8 | CGPAT532 |
| 50 | • | 43 | 4 | 71.5 | 5.5 | 56.5 | 7.5 | 9 | 8 | CGPAT550 |
| 75 | | 43 | 4 | 97.0 | 5.5 | 82.0 | 7.5 | 9 | 8 | CGPAT575 |
| 100 | | 43 | 4 | 122.0 | 5.5 | 107.0 | 7.5 | 9 | 8 | CGPAT5100 |

AT10

| Belt Width mm | In Stock | Length mm | B mm | Width mm | Hole Dia. mm | E mm | F mm | M mm | Thickness mm | Part Number |
|------------------|-------------|--------------|---------|-------------|-----------------|---------|---------|---------|-----------------|-------------|
| 16 | | 85 | 7.5 | 46.5 | 9 | 26.5 | 10 | 17.5 | 15 | CGPAT1016 |
| 20 | | 85 | 7.5 | 50.5 | 9 | 30.5 | 10 | 17.5 | 15 | CGPAT1020 |
| 25 | • | 85 | 7.5 | 55.5 | 9 | 35.5 | 10 | 17.5 | 15 | CGPAT1025 |
| 32 | • | 85 | 7.5 | 62.5 | 9 | 42.5 | 10 | 17.5 | 15 | CGPAT1032 |
| 50 | • | 85 | 7.5 | 80.5 | 9 | 60.5 | 10 | 17.5 | 15 | CGPAT1050 |
| 75 | | 85 | 7.5 | 106.0 | 9 | 86.0 | 10 | 17.5 | 15 | CGPAT1075 |
| 100 | | 85 | 7.5 | 131.0 | 9 | 111.0 | 10 | 17.5 | 15 | CGPAT10100 |
| 150 | | 85 | 7.5 | 181.0 | 9 | 161.0 | 10 | 17.5 | 15 | CGPAT10150 |

AT20

| Belt Width mm | In Stock | Length mm | B mm | Width mm | Hole Dia. mm | E mm | F mm | M mm | Thickness mm | Part Number |
|------------------|-------------|--------------|---------|-------------|-----------------|---------|---------|---------|-----------------|-------------|
| 25 | | 170 | 15 | 61.5 | 11 | 38.5 | 11.5 | 35 | 20 | CGPAT2025 |
| 32 | | 170 | 15 | 68.5 | 11 | 45.5 | 11.5 | 35 | 20 | CGPAT2032 |
| 50 | | 170 | 15 | 86.5 | 11 | 63.5 | 11.5 | 35 | 20 | CGPAT2050 |
| 75 | | 170 | 15 | 111.5 | 11 | 88.5 | 11.5 | 35 | 20 | CGPAT2075 |
| 100 | | 170 | 15 | 136.5 | 11 | 113.5 | 11.5 | 35 | 20 | CGPAT20100 |
| 150 | | 170 | 15 | 186.5 | 11 | 163.5 | 11.5 | 35 | 20 | CGPAT20150 |

Clamp Plates

H

| Belt Width inch | In Stock | Length inch | B inch | Width inch | Hole Dia. inch | E inch | F inch | M inch | Thickness inch | Part Number |
|--------------------|-------------|----------------|-----------|---------------|-------------------|-----------|-----------|-----------|-------------------|-------------|
| 1.000 | • | 4.32 | 0.41 | 2.29 | 0.406 | 1.45 | 0.42 | 0.91 | 0.87 | CGPH100 |
| 2.000 | | 4.32 | 0.41 | 3.29 | 0.406 | 2.45 | 0.42 | 0.91 | 0.87 | CGPH200 |

HTD8



| Belt Width mm | Length mm | B mm | Width mm | Hole Dia. mm | E mm | F mm | M mm | Thickness mm | Part Number |
|------------------|--------------|---------|-------------|-----------------|---------|---------|---------|-----------------|-------------|
| 25 | 72 | 8 | 55.5 | 9 | 35.5 | 10 | 16 | 15 | CGP8HTD25 |

HTD14

| Belt Width mm | Length mm | B mm | Width mm | Hole Dia. mm | E mm | F mm | M mm | Thickness mm | Part Number |
|------------------|--------------|---------|-------------|-----------------|---------|---------|---------|-----------------|-------------|
| 25 | 126 | 14 | 60.5 | 11 | 37.5 | 11.5 | 28 | 22 | CGP14HTD25 |
| 40 | 126 | 14 | 75.5 | 11 | 52.5 | 11.5 | 28 | 22 | CGP14HTD40 |
| 55 | 126 | 14 | 91.0 | 11 | 68.0 | 11.5 | 28 | 22 | CGP14HTD55 |
| 85 | 126 | 14 | 121.0 | 11 | 98.0 | 11.5 | 28 | 22 | CGP14HTD85 |
| 100 | 126 | 14 | 136.0 | 11 | 113.0 | 11.5 | 28 | 22 | CGP14HTD100 |
| 115 | 126 | 14 | 151.0 | 11 | 128.0 | 11.5 | 28 | 22 | CGP14HTD115 |
| 170 | 126 | 14 | 206.0 | 11 | 183.0 | 11.5 | 28 | 22 | CGP14HTD170 |

• = in stock

Material: Aluminum

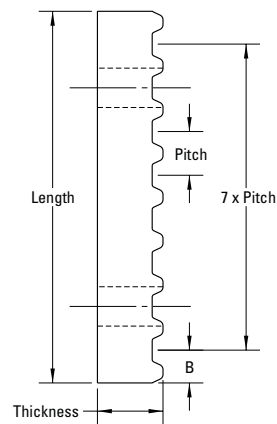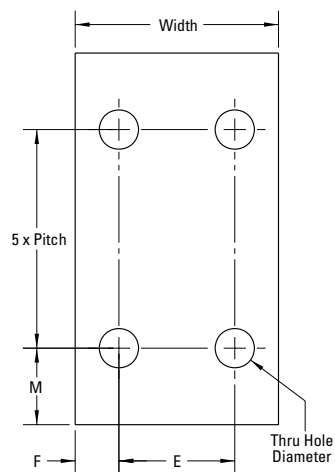

Technical Design Tools Online

Gates Mectrol's belt design tools make selecting the right belt for your application easy anytime: <http://apps.gatesmectrol.com/>


Gates Mectrol offers online design tools for calculating all types of urethane timing belt applications.

These design tools are, by far, industry state-of-the-art, offering the most comprehensive, easy to use and accurate calculations available.

For linear and rotary positioning applications, synchronous conveying or power transmission, simply enter all of your known parameters, and these programs will guide you through step-by-step calculations, resulting in the selection of the most appropriate belt for your application.

Included with your output will be information which is "total system" inclusive, providing necessary data for selecting all related drive components, as well as for programming electronic controls.

Log on to www.gatesmectrol.com today, and register for instant access to the industry's best calculation tools available.

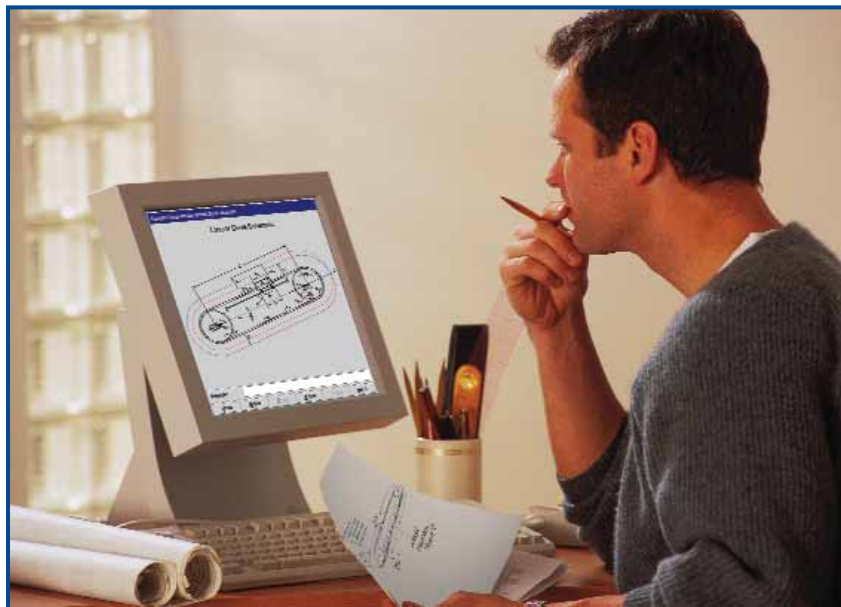


>> To access our design tools online visit <http://apps.gatesmectrol.com/> or call **1-800-394-4844**

Facilities



Headquarters

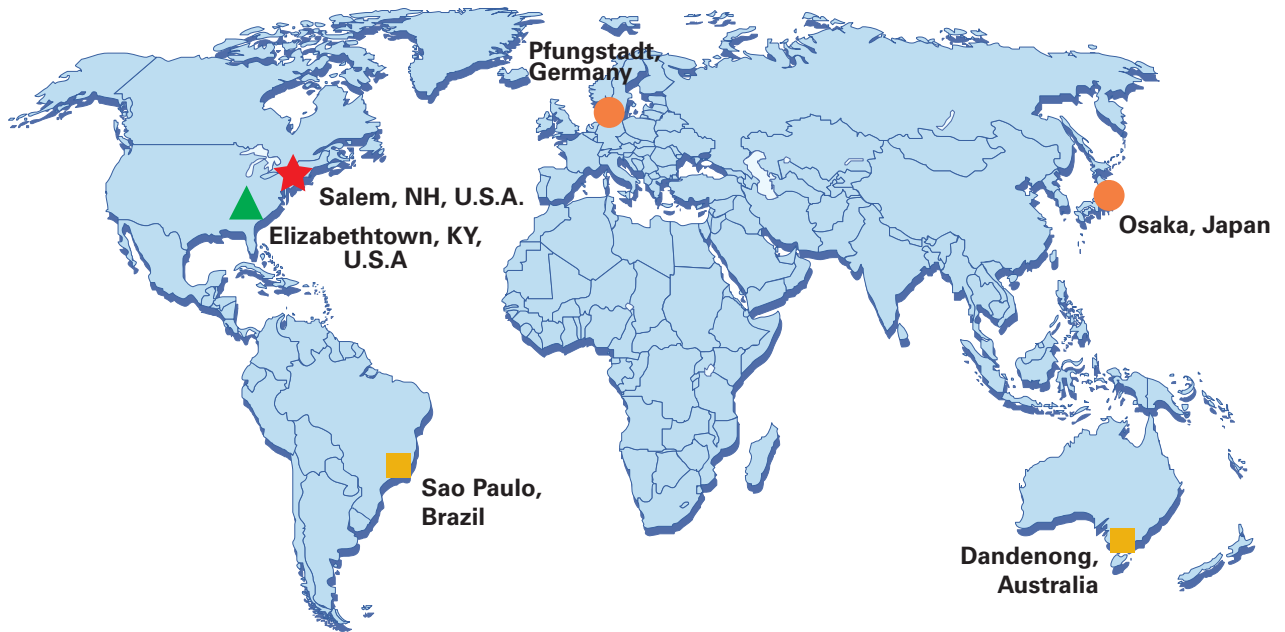

- ★ Headquarters, Sales & Manufacturing
- Sales & Manufacturing
- Sales
- ▲ Manufacturing

**USA
CORPORATE HEADQUARTERS**

Gates Mectrol, Inc.
9 Northwestern Drive
Salem, NH 03079, U.S.A.
Tel. +1 (603) 890-1515
Tel. +1 (800) 394-4844
Fax +1 (603) 890-1616
email: contact@gatesmectrol.com

EUROPE

Gates Mectrol GmbH
Werner von Siemens Strasse 2
64319 Pfungstadt, Germany
Tel. +49 (0) 6157-9727-0
Fax +49 (0) 6157-9727-272
email: info@gatesmectrol.de

MEXICO

Gates de Mexico S.A. de C.V.
Cerrada de Galeana 5
Fracc. Industrial La Loma
Tlalnepantla, 54060, Mexico
Tel. +52 (552) 000-2700
Fax +52 (552) 000-2701
email: em1009@gates.com

AUSTRALIA



Gates Australia Pty Ltd.
1-15 Hydrive Close
South Dandenong, Victoria 3175, Australia
Tel. +61 (3) 9797-9688
Fax +61 (3) 9797-9600
email: southpacsales@gates.com

SOUTH AMERICA

Gates Do Brazil Ind. Com. Ltda
Av. Santa Maria, 600
Jacarei, SP 12328-320, Brazil
Tel. +55 (11) 3848-8122
Fax +55 (11) 3848-8170
email: gatesmkt@gatesbrasil.com.br

ASIA

Gates Unitta Asia Company
4-26 Sakuragawa 4-chome,
Naniwa-KU
556-0022 Osaka, Japan
Tel. +81 (6) 6563-1266
Fax +81 (6) 6563-1267

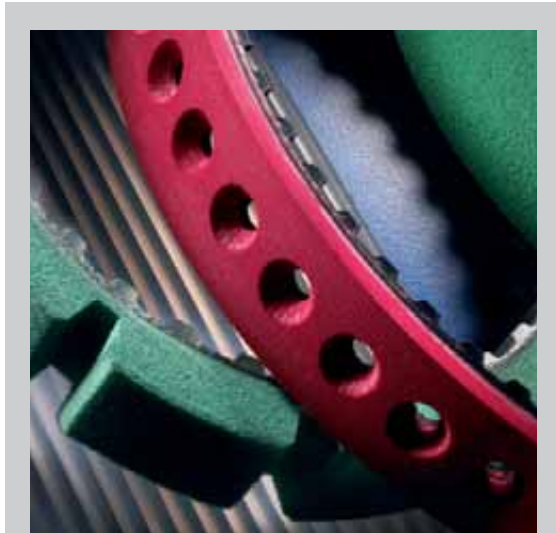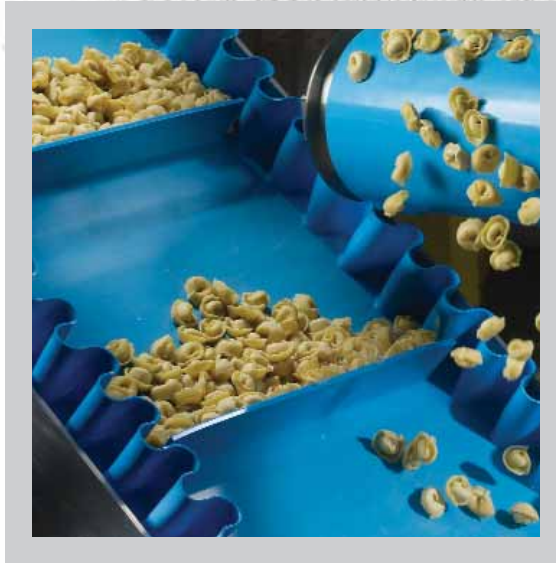

Gates Mectrol and GMT3™ are registered trademarks of Gates Mectrol Incorporated. Synchro-Power is a registered trademark of Gates Corporation. All other trademarks used herein are the property of their respective owners.

© Copyright 2014 Gates Mectrol Incorporated.
All rights reserved. 7/14

GM_UTB_14_US